


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

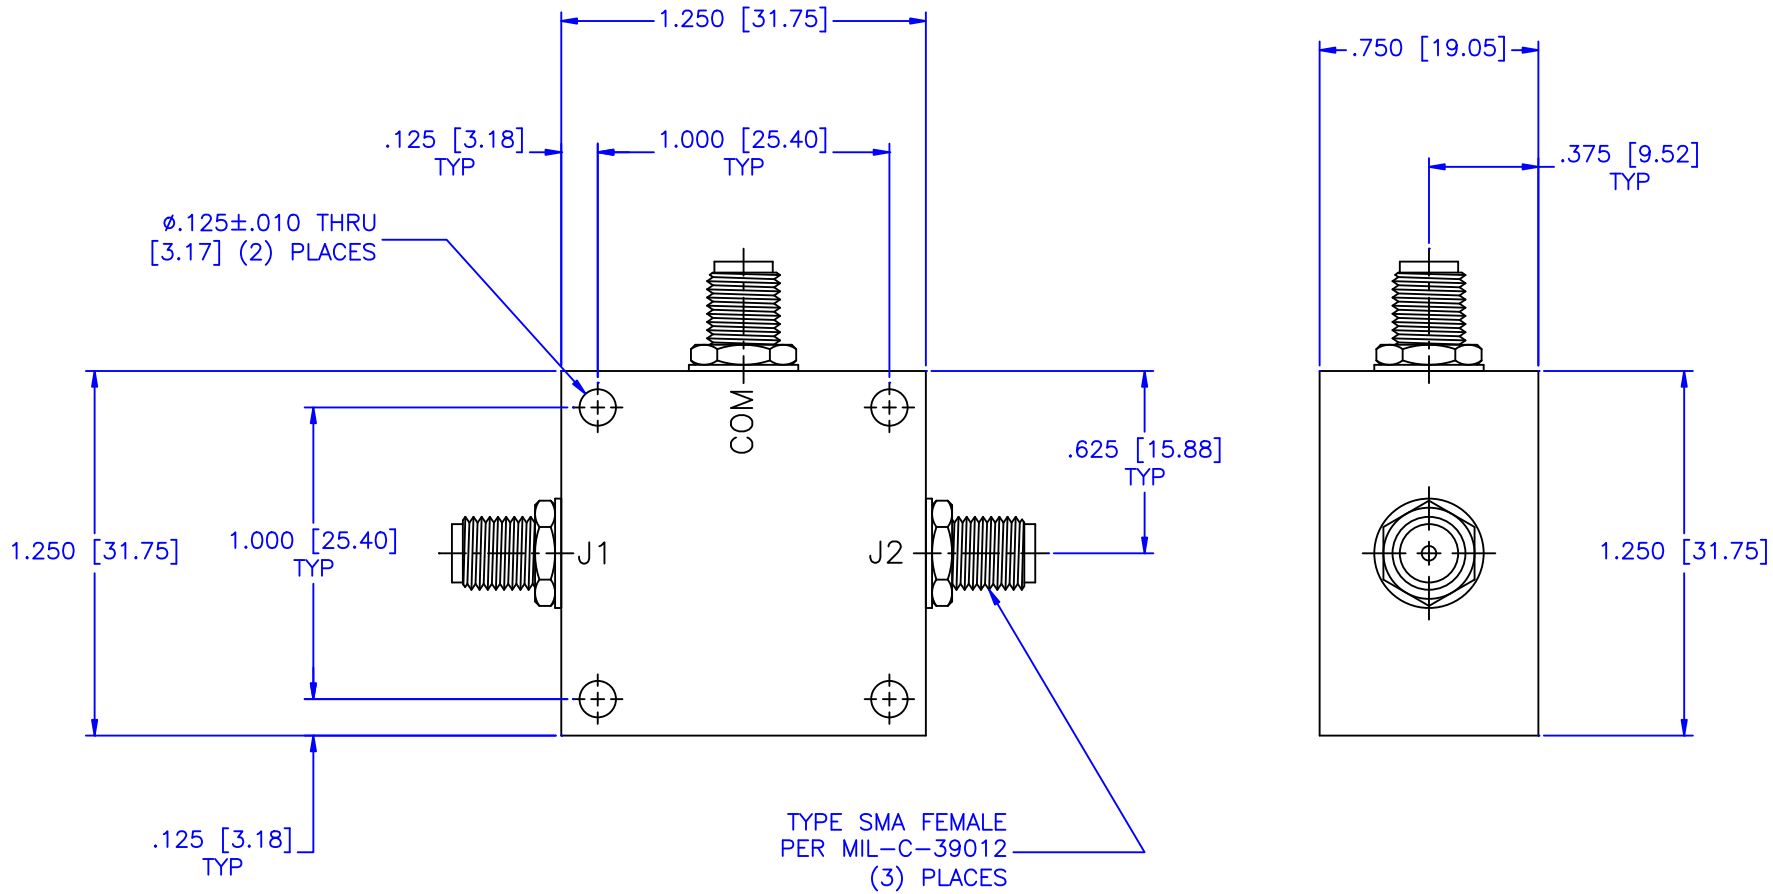

SPECIFICATIONS:

Frequency Range:	0.3 to 60 MHz
Isolation:	35dB Min.
VSWR In/Out:	1.30:1/1.30:1 Max.
Insertion Loss:	0.5dB Max.
Amplitude Unbalance:	± 0.2 dB Max.
Phase Unbalance:	$\pm 1^\circ$ Max.
Power: (Load vswr@1.2)	1 Watt

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-1		
DATE: 10-12-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 10-12-1997		SIZE: A REV: N/A DWG NO.: 80124 DO NOT SCALE THE DRAWING
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)				