


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

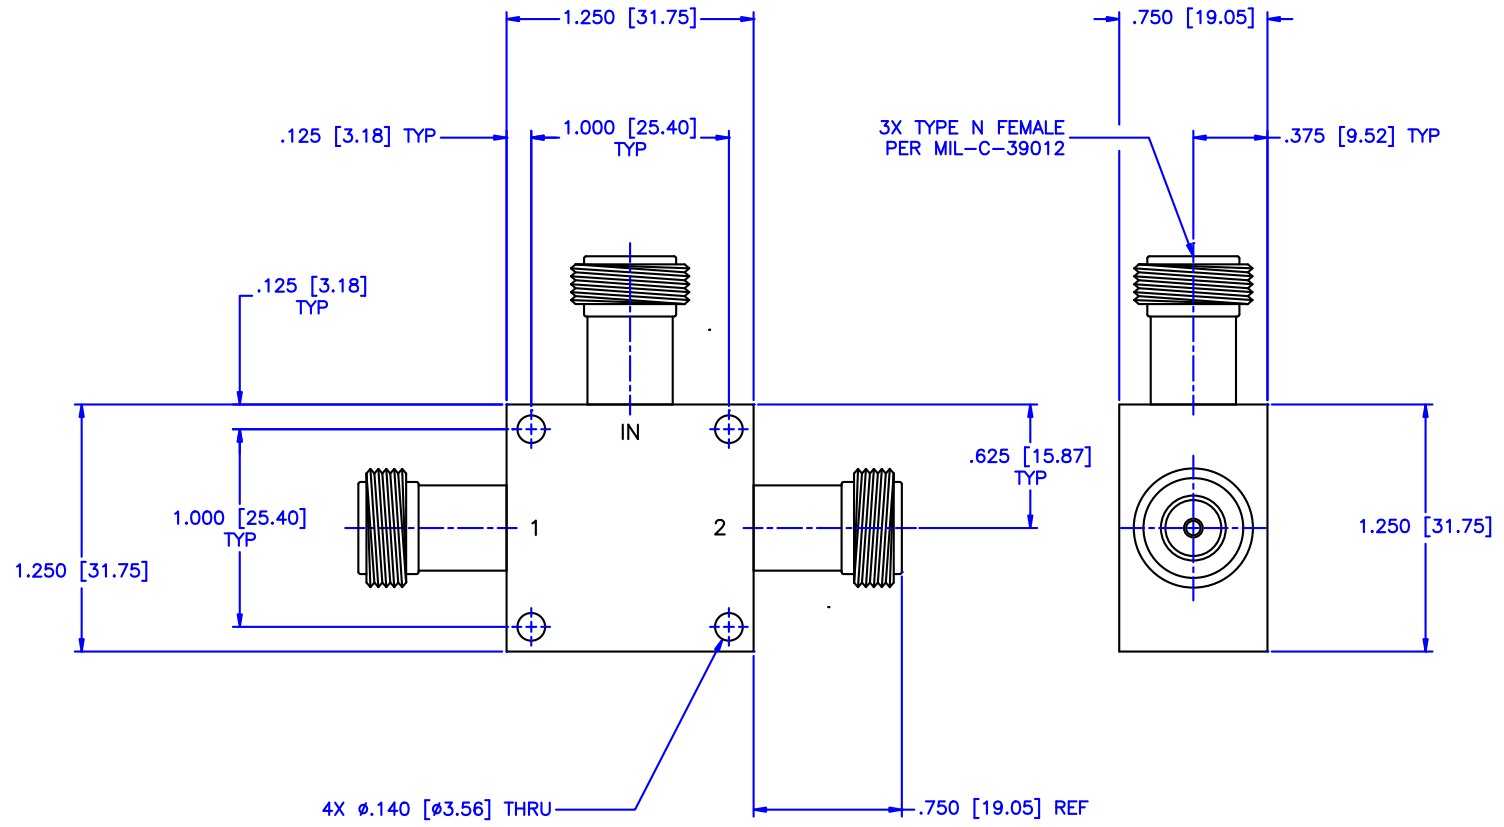

**SPECIFICATIONS:**

- Frequency Range: 5–3000 MHz
- VSWR: 1.60:1 Max.
- Amplitude Balance:  $\pm 0.5$ dB Max.
- Phase Balance:  $\pm 6^\circ$  Deg. Max.
- Insertion Loss: 2.5dB Max.
- Isolation: 15dB Min.
- Input Power: 1 Watt

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	2-WAY POWER DIVIDER
DRAWN:		DATE:		PART NO.		DWG NO.
Paiboon Luekhamhan		05-27-2011		PL2-17/NF		
APPROVED:		DATE:		CAGE CODE:	SIZE:	REV:
T. Nguyen		05-27-2011		OD2L5	A	N/A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		85704
		THIRD ANGLE PROJECTION 				