


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

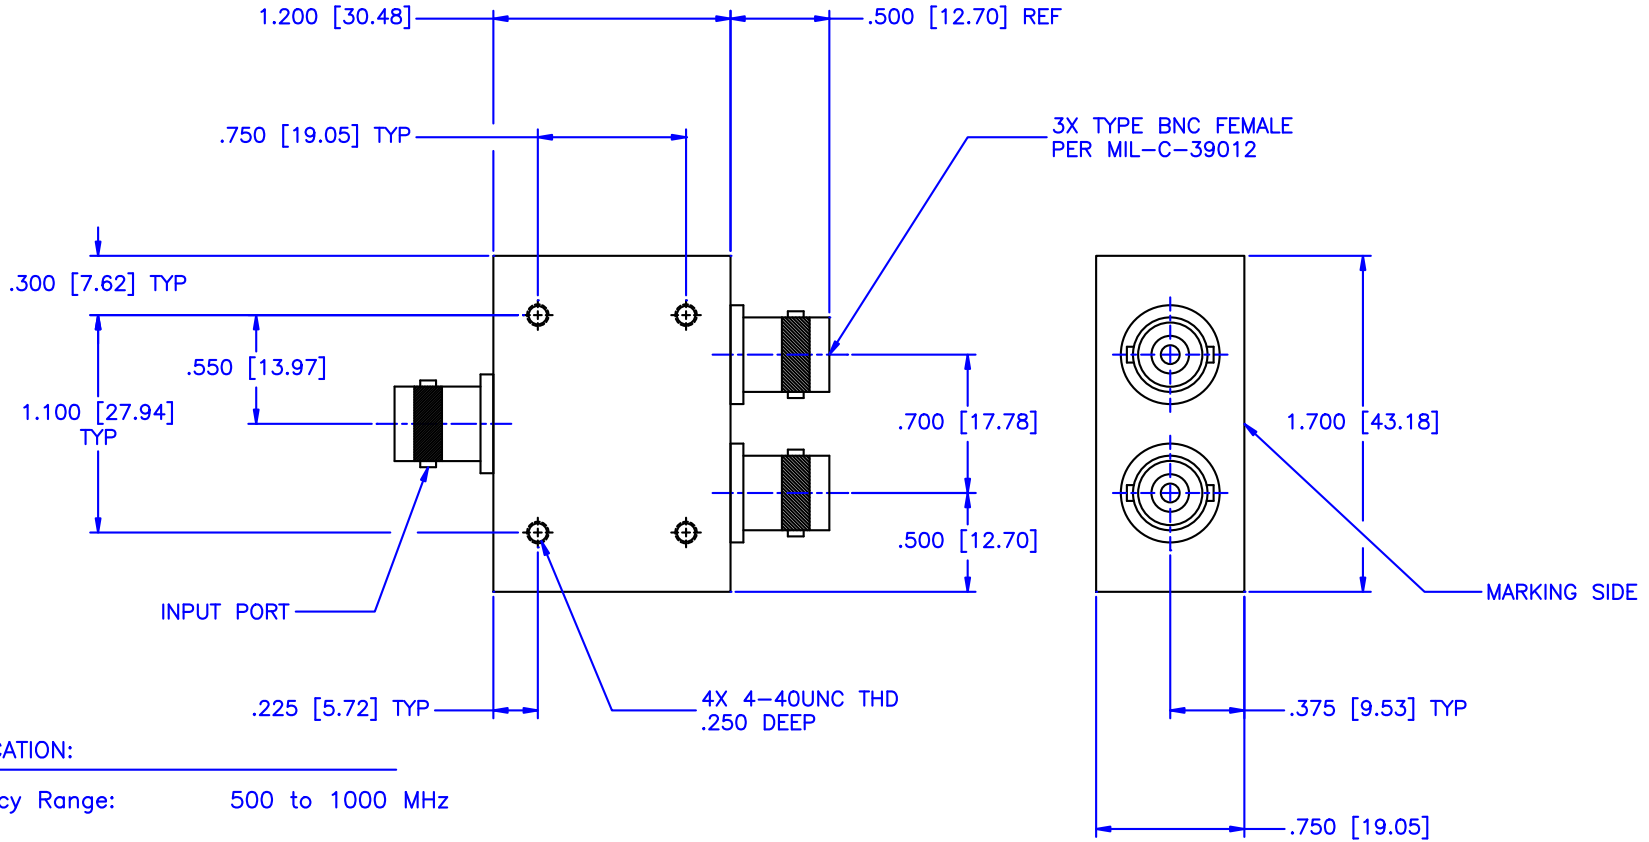

SPECIFICATION:

Frequency Range: 500 to 1000 MHz
Isolation: 15dB Min.
VSWR: 1.30:1 Max.
Insertion Loss: 0.8dB Max.
Amplitude Unbalance: ±0.3dB Max.
Phase Unbalance: ±3° Max.
Impedance: 50 Ohm
Operating Temperature: -40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-19-S/BF		
DATE: 05-20-2009	DATE: 05-20-2009	CAGE CODE: OD2L5		
APPROVED: T. Nguyen	DATE: 05-20-2009	SIZE: A	REV: N/A	DWG NO. 84490
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		<small>THIRD ANGLE PROJECTION</small> 		
		DO NOT SCALE THE DRAWING		