


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

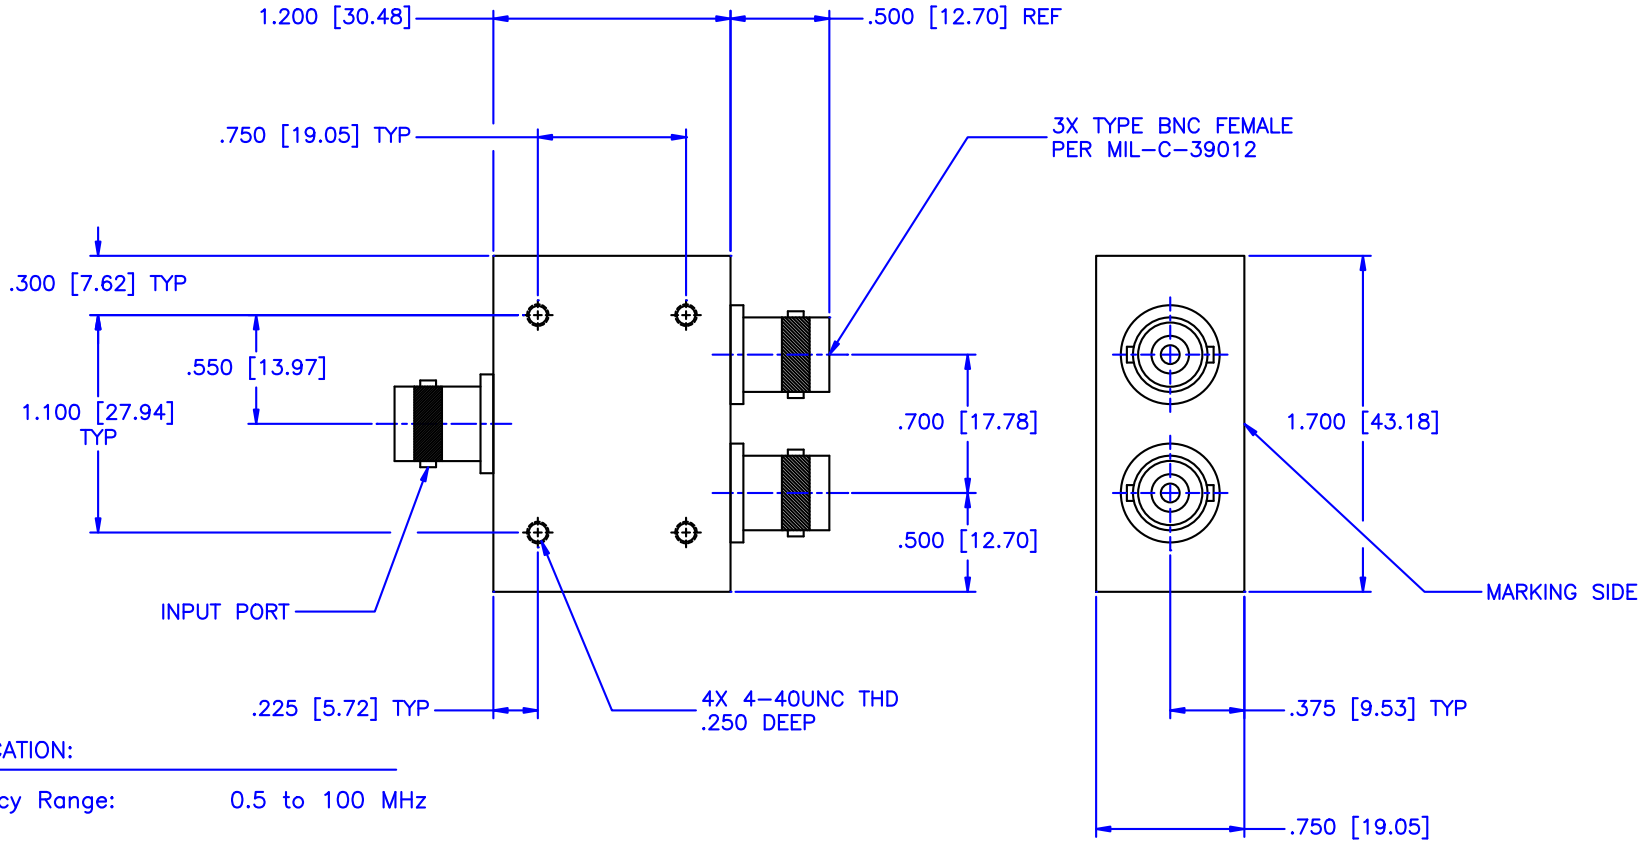

SPECIFICATION:


- Frequency Range: 0.5 to 100 MHz
- Isolation: 28dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 0.5dB Max.
- Amplitude Unbalance: ±0.2dB Max.
- Phase Unbalance: ±1° Max.
- Impedance: 50 Ohm
- Operating Temperature: -40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-2-S/BF		
DATE: 09-04-2001	DATE: 09-04-2001	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen		DO NOT SCALE THE DRAWING		DWG NO. 81932



UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



DRAWING TITLE:
2-WAY POWER DIVIDER

PART NO.
PL2-2-S/BF

CAGE CODE: OD2L5
SIZE: A
REV: N/A
DO NOT SCALE THE DRAWING
DWG NO. 81932