


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

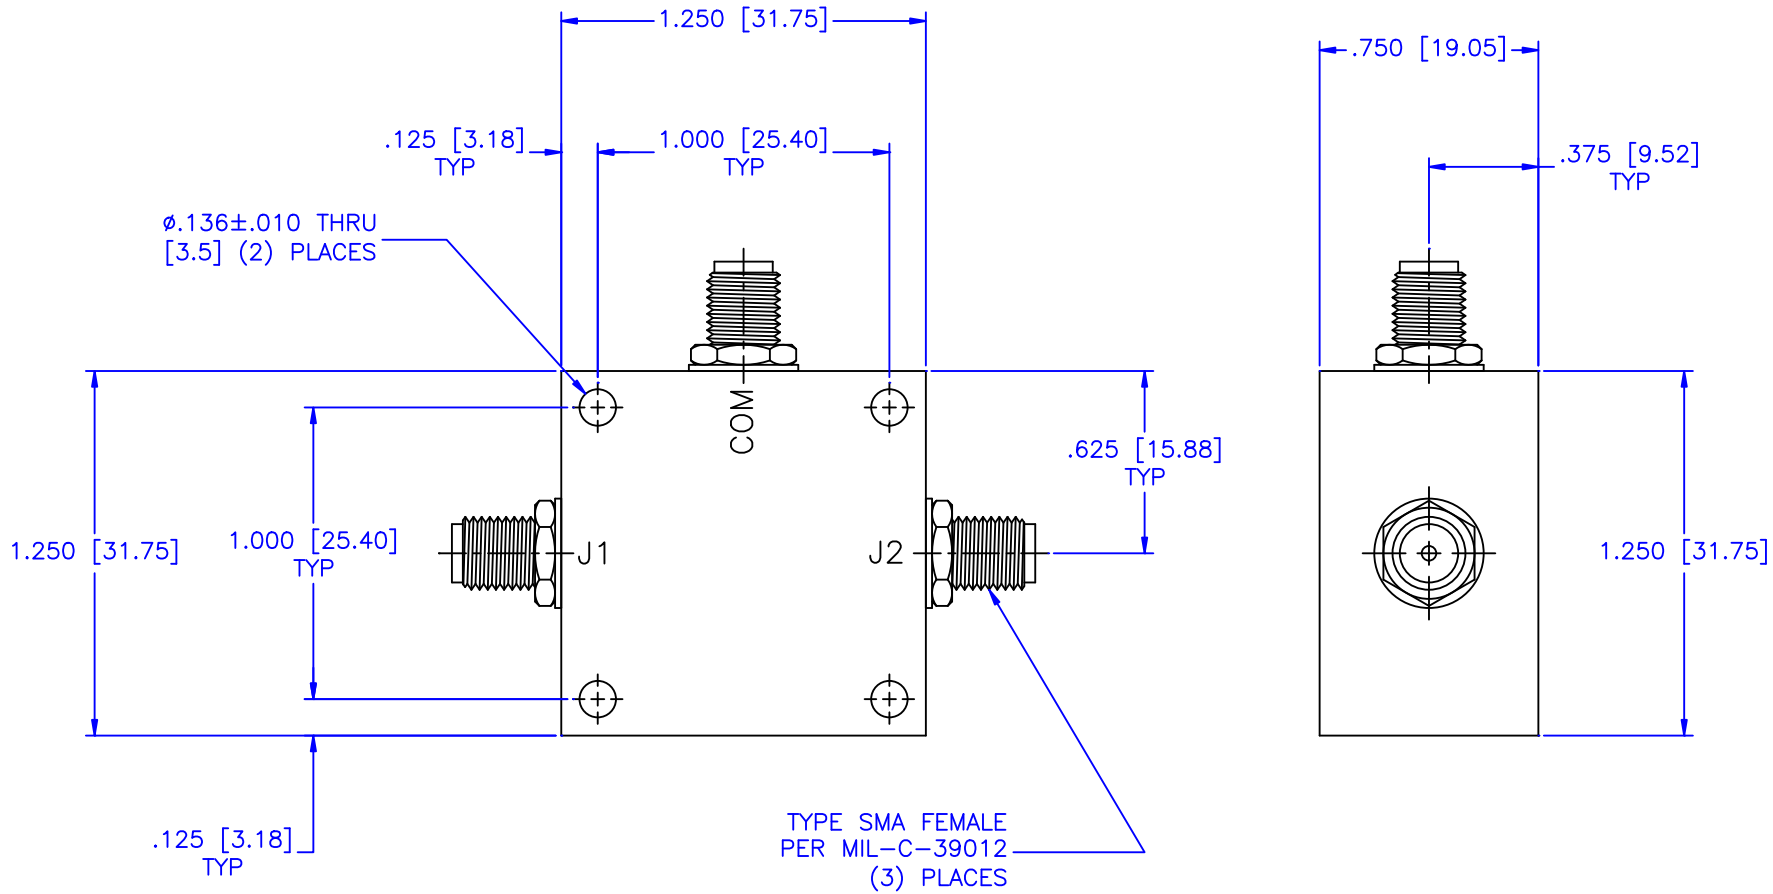

TYPE SMA FEMALE
PER MIL-C-39012
(3) PLACES

SPECIFICATIONS

FREQUENCY RANGE:	0.5 to 100 MHz
INSERTION LOSS:	0.5dB Max.
ISOLATION:	30dB Min.
AMPLITUDE UNBALANCE:	± 0.2 dB Max.
PHASE UNBALANCE:	$\pm 2.0^\circ$ Max.
IMPEDANCE:	50 Ohms
VSWR:	1.30:1 Max.
OPERATING TEMPERATURE	-30°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-2		
DATE: 12-22-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 12-22-1997		SIZE: A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV: N/A		DWG NO. 80125
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		