


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

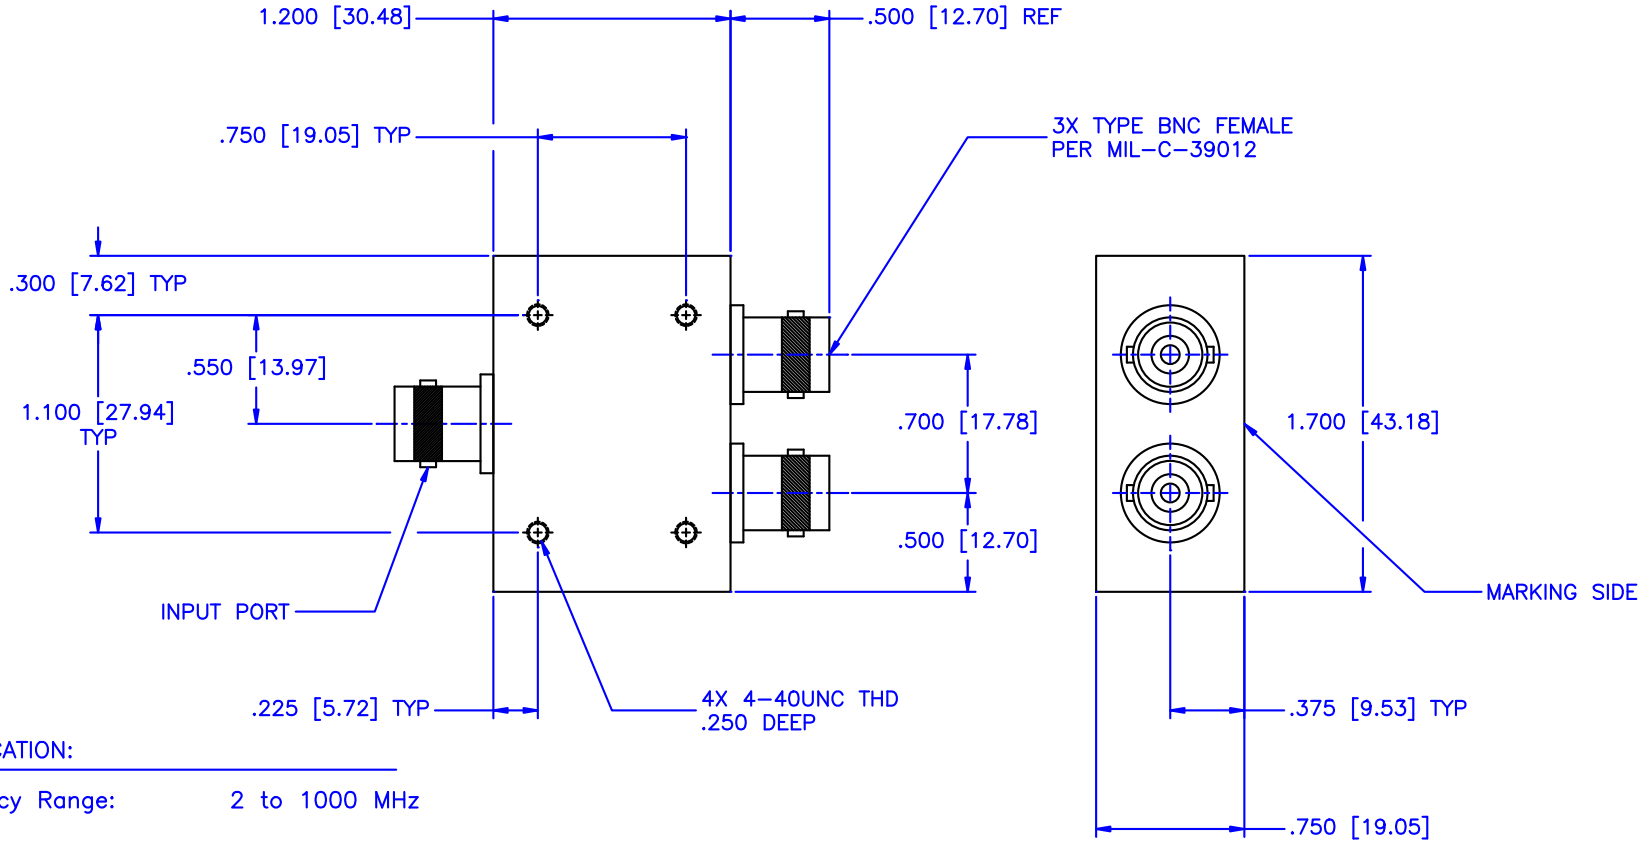

SPECIFICATION:

- Frequency Range: 2 to 1000 MHz
- Isolation: 17dB Min.
- Power: 1 Watt Max.
- Insertion Loss: 1.5dB Max.
- Amplitude Unbalance: ±0.6dB Max.
- Phase Unbalance: ±4° Max.
- Impedance: 50 Ohm
- Operating Temperature: -40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-27-S/BF		
DATE: 05-20-2009	DATE: 05-20-2009	CAGE CODE: OD2L5		
APPROVED: T. Nguyen	DATE: 05-20-2009	SIZE: A	REV: N/A	DWG NO. 84491
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		