


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

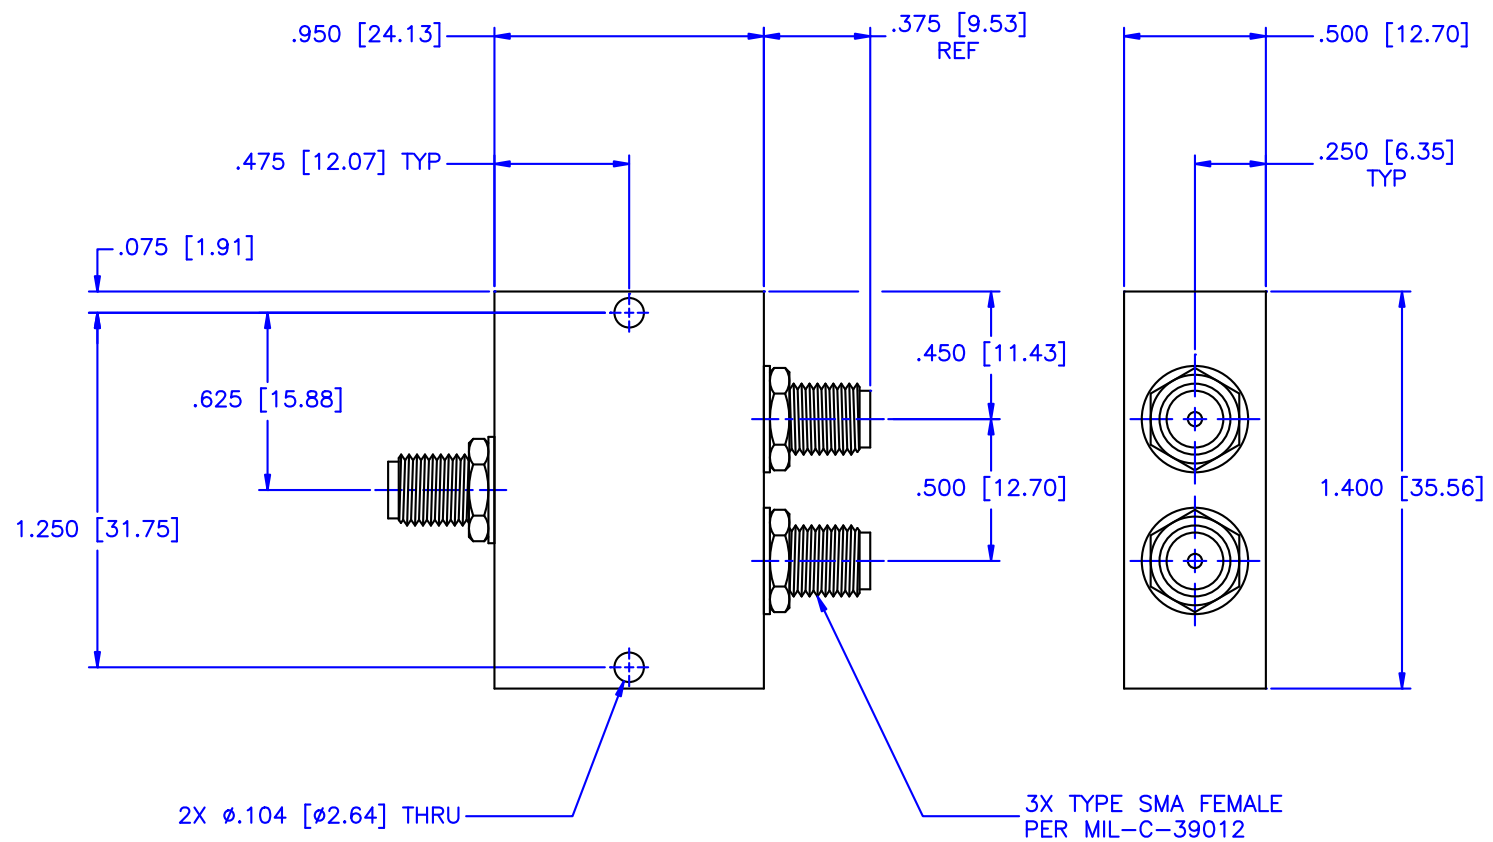

SPECIFICATIONS

- FREQUENCY RANGE: 5 TO 500 MHz
- INPUT POWER: 3 Watts Max.
- INSERTION LOSS: 0.80 Max.
- V.S.W.R: 1.30:1 Max.
- ISOLATION: 25dB Max.
- PHASE BALANCE: ±2.0° Max.
- AMPLITUDE BALANCE: ±0.2dB Max.
- IMPEDANCE: 50 Ohms
- OPERATING TEMP. RANGE: -30°C TO +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		PART NO.: PL2-3-3	
DATE: 05-27-2009	DATE: 05-27-2009	CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 05-27-2009	REV: B	DWG NO.: 84517
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	