


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

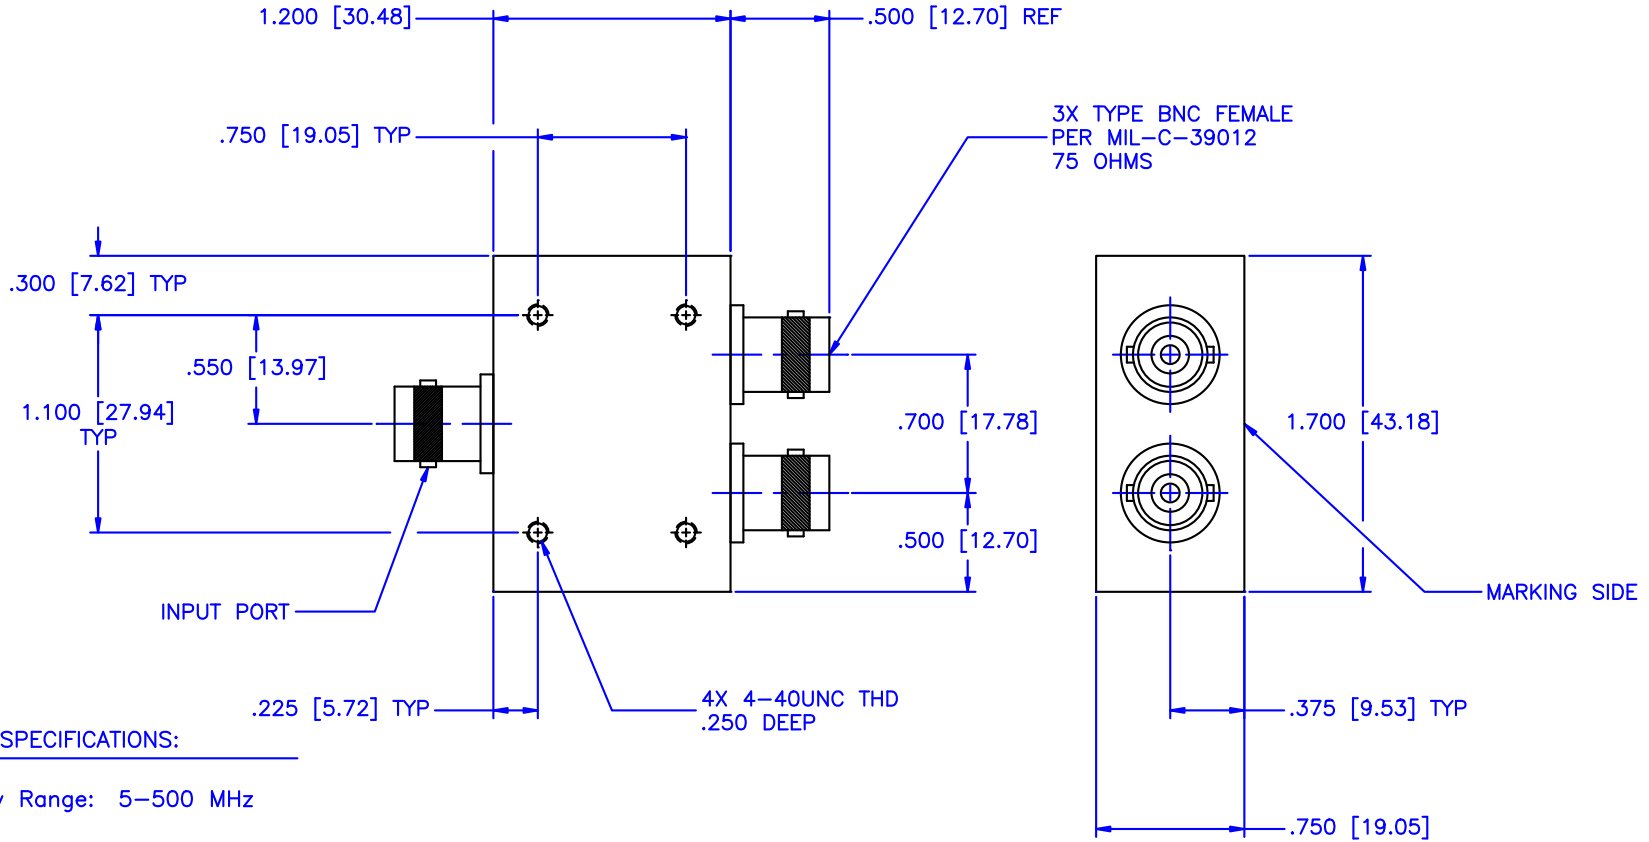

SPECIFICATIONS:

- Frequency Range: 5-500 MHz
- Isolation: 18dB Min.
- Insertion Loss: 0.7dB Max.
- Amplitude Balance: ±0.4dB Max.
- VSWR: 1.20:1 Max.
- Phase Balance: ±3° Max.
- Impedance: 75 Ohm
- Input Power: 1 Watt Max. (as a splitter)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-3-S-75/BF		
DATE: 09-04-2001	DATE: 09-04-2001	CAGE CODE: OD2L5		DWG NO. 81840
APPROVED: T. Nguyen		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
THIRD ANGLE PROJECTION		SIZE: A		REV: A
		DO NOT SCALE THE DRAWING		