


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

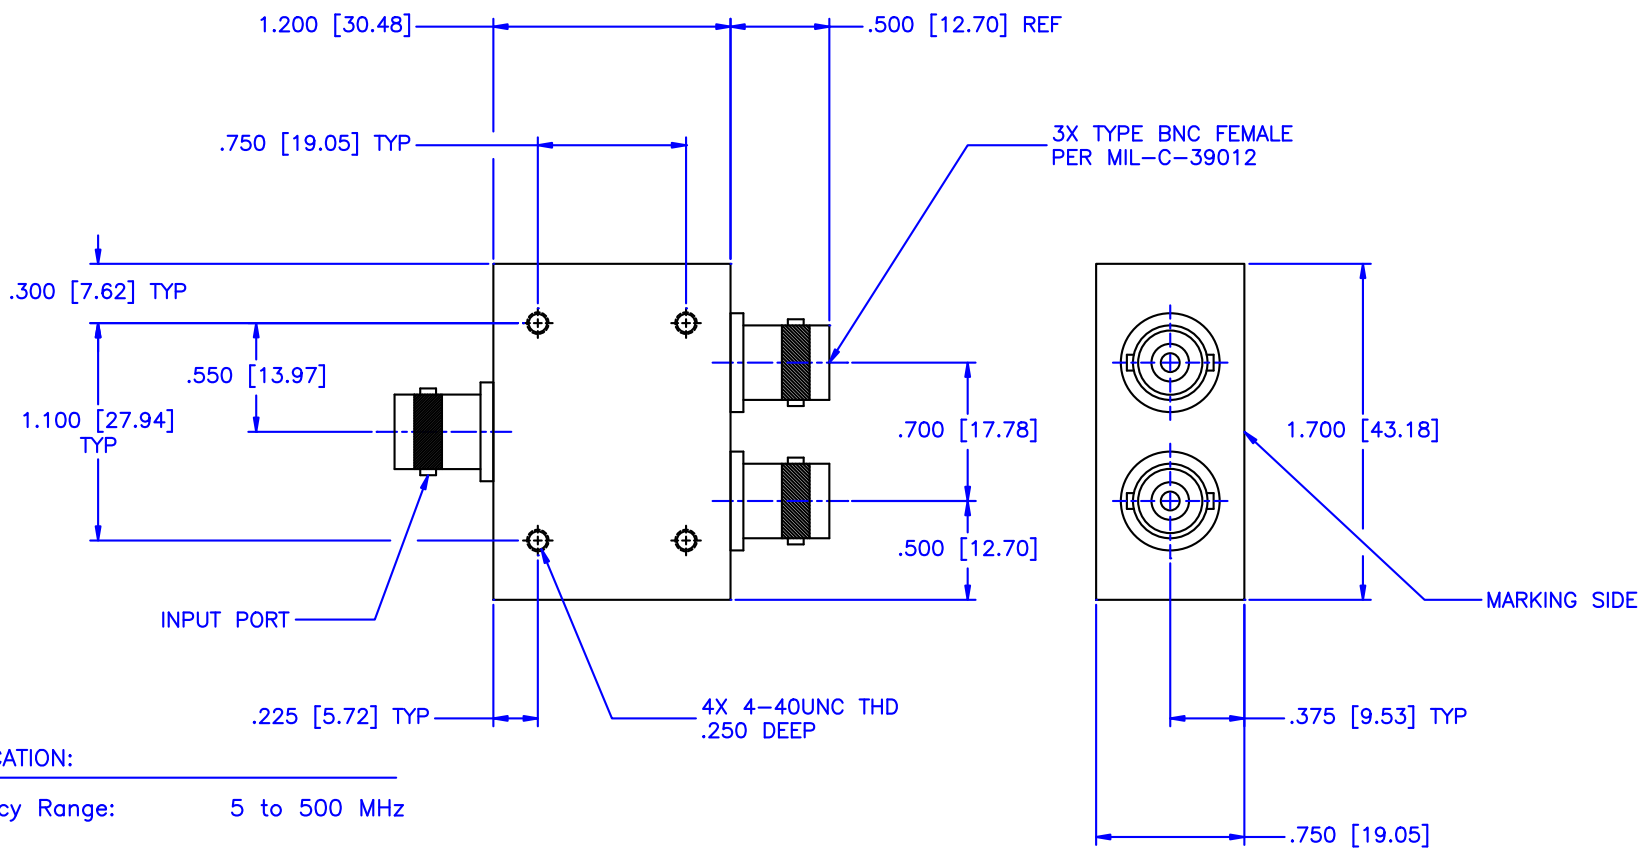

**SPECIFICATION:**

- Frequency Range: 5 to 500 MHz
- Isolation: 23dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 1.2dB Max.
- Amplitude Unbalance: ±0.3dB Max.
- Phase Unbalance: ±3° Max.
- Impedance: 50 Ohm
- Operating Temperature: -40°C to +85°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>2-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PL2-3-S/BF</b>		
DATE: 05-19-2009	DATE: 05-19-2009	CAGE CODE: OD2L5		
APPROVED: T. Nguyen	DATE: 05-19-2009	SIZE: A	REV: N/A	DWG NO. 84486
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		