


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

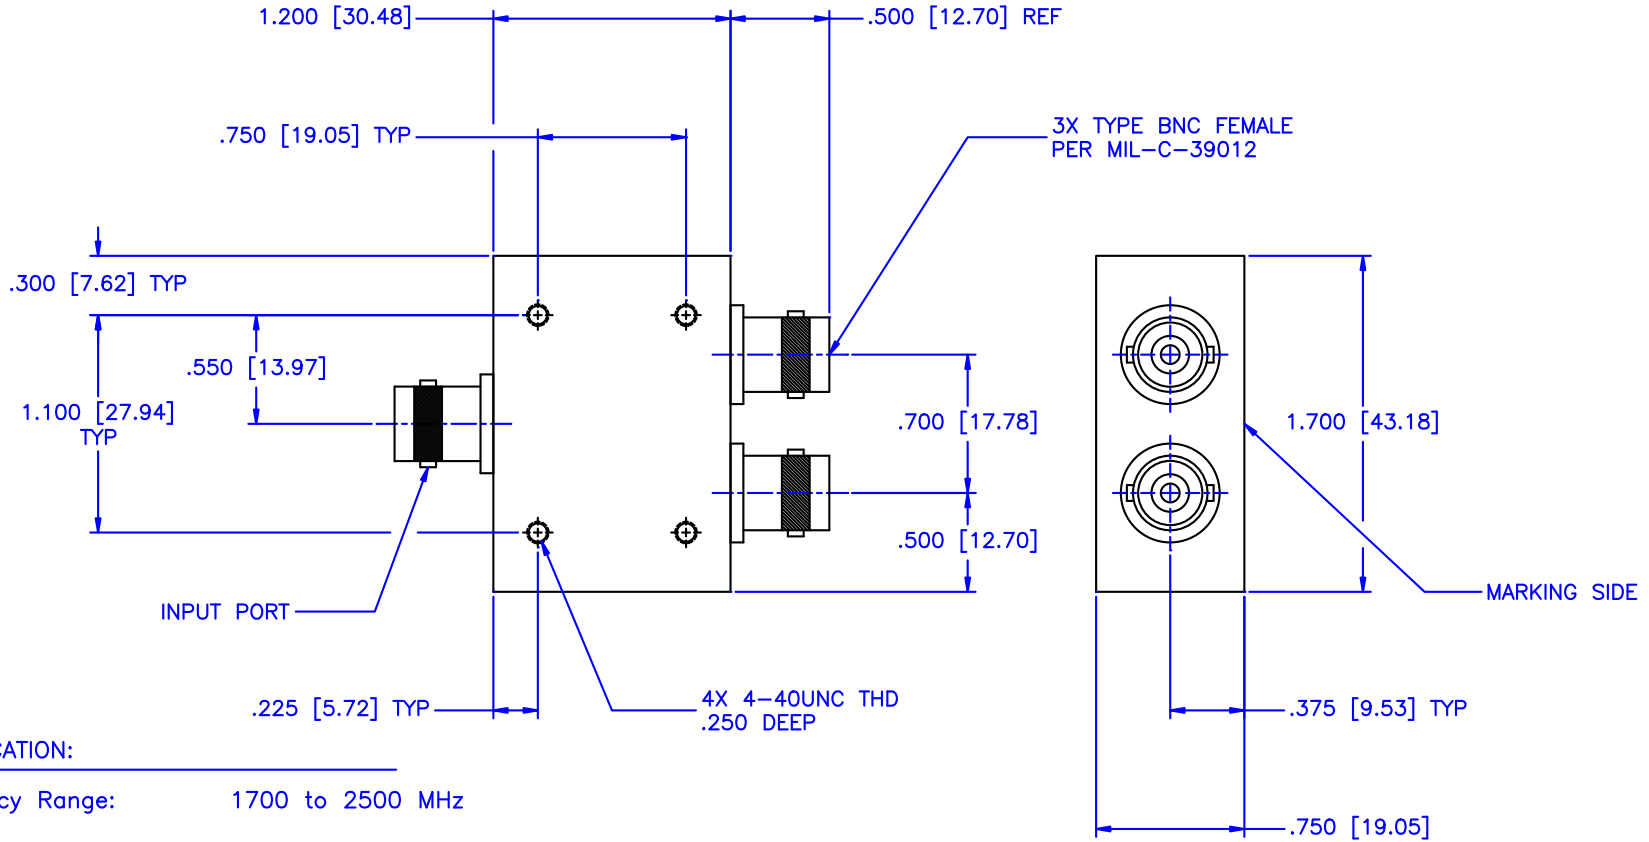

SPECIFICATION:

- Frequency Range: 1700 to 2500 MHz
- Isolation: 16dB Min.
- Power: 1 Watt Max.
- Insertion Loss: 1.3dB Max.
- Amplitude Unbalance: ±0.9dB Max.
- Phase Unbalance: ±10° Max.
- Impedance: 50 Ohm
- Operating Temperature: -40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 2-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 05-20-2009	PART NO. PL2-31-S/BF	
APPROVED: T. Nguyen		DATE: 05-20-2009	CAGE CODE: 0D2L5	SIZE: A REV: N/A DWG NO. 84493
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DO NOT SCALE THE DRAWING	
		THIRD ANGLE PROJECTION 		