


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

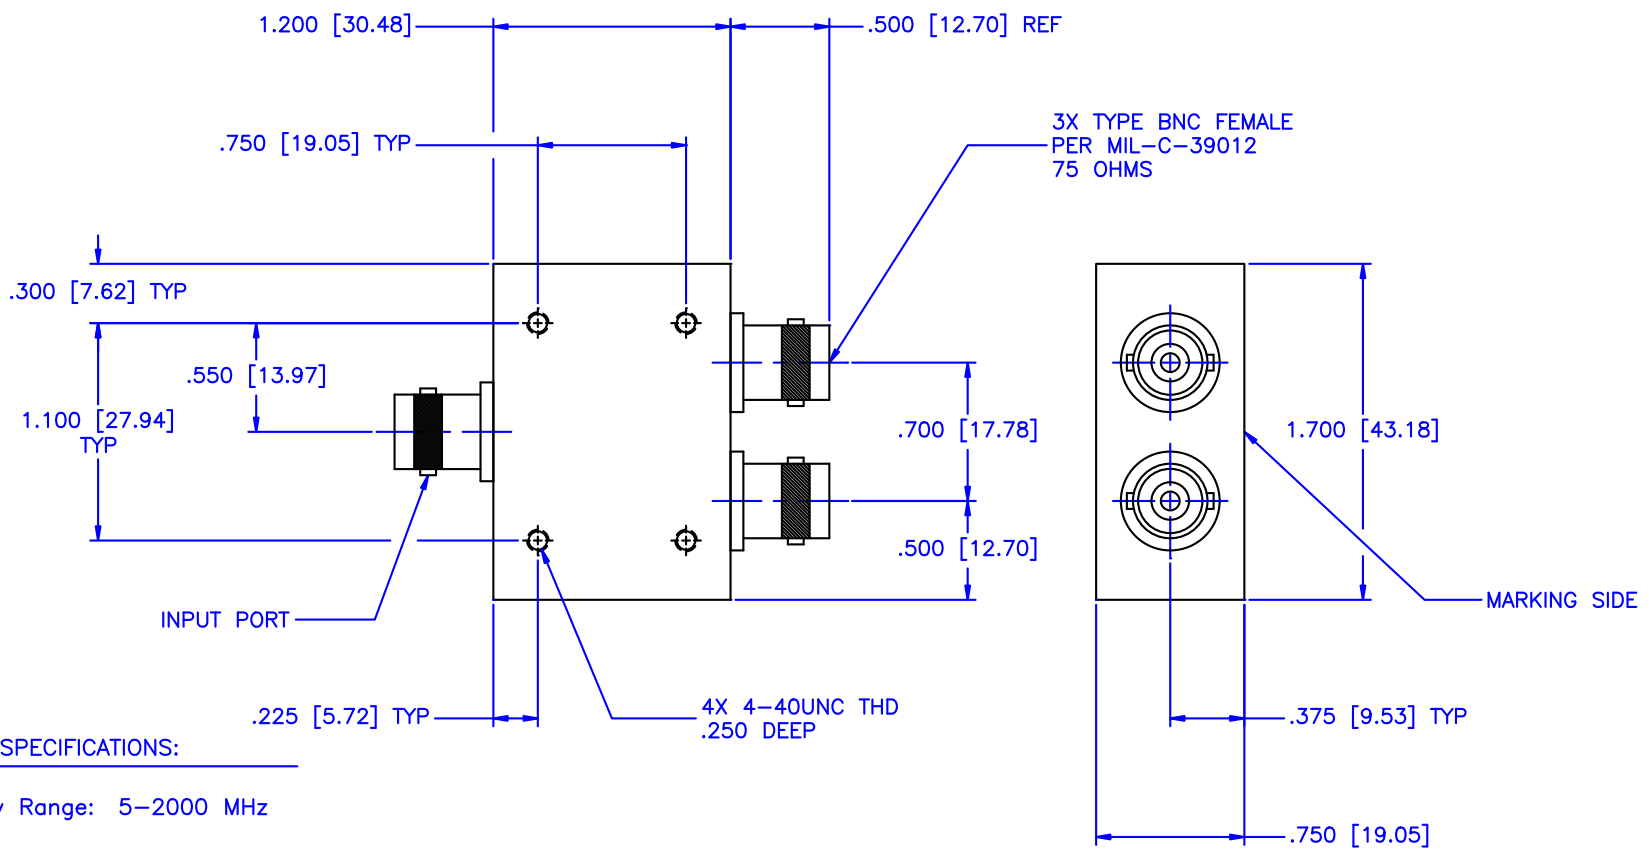

SPECIFICATIONS:


- Frequency Range: 5–2000 MHz
- Isolation: 15dB Min.
- Insertion Loss: 1.4dB Max.
- Amplitude Balance: ±0.6dB Max.
- VSWR: 1.20:1 Max.
- Phase Balance: ±5° Max.
- Impedance: 75 Ohm
- Input Power: 0.5 Watt Max. (as a splitter)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-37-S-75/BF		
DATE: 04-12-2010	DATE: 04-12-2010	CAGE CODE: OD2L5	SIZE: A REV: A	DWG NO. 84752
APPROVED: T. Nguyen		DO NOT SCALE THE DRAWING		



UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



DRAWING TITLE:
2-WAY POWER DIVIDER

PART NO.
PL2-37-S-75/BF

CAGE CODE: OD2L5
SIZE: A
REV: A
DWG NO.: 84752
DO NOT SCALE THE DRAWING