


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

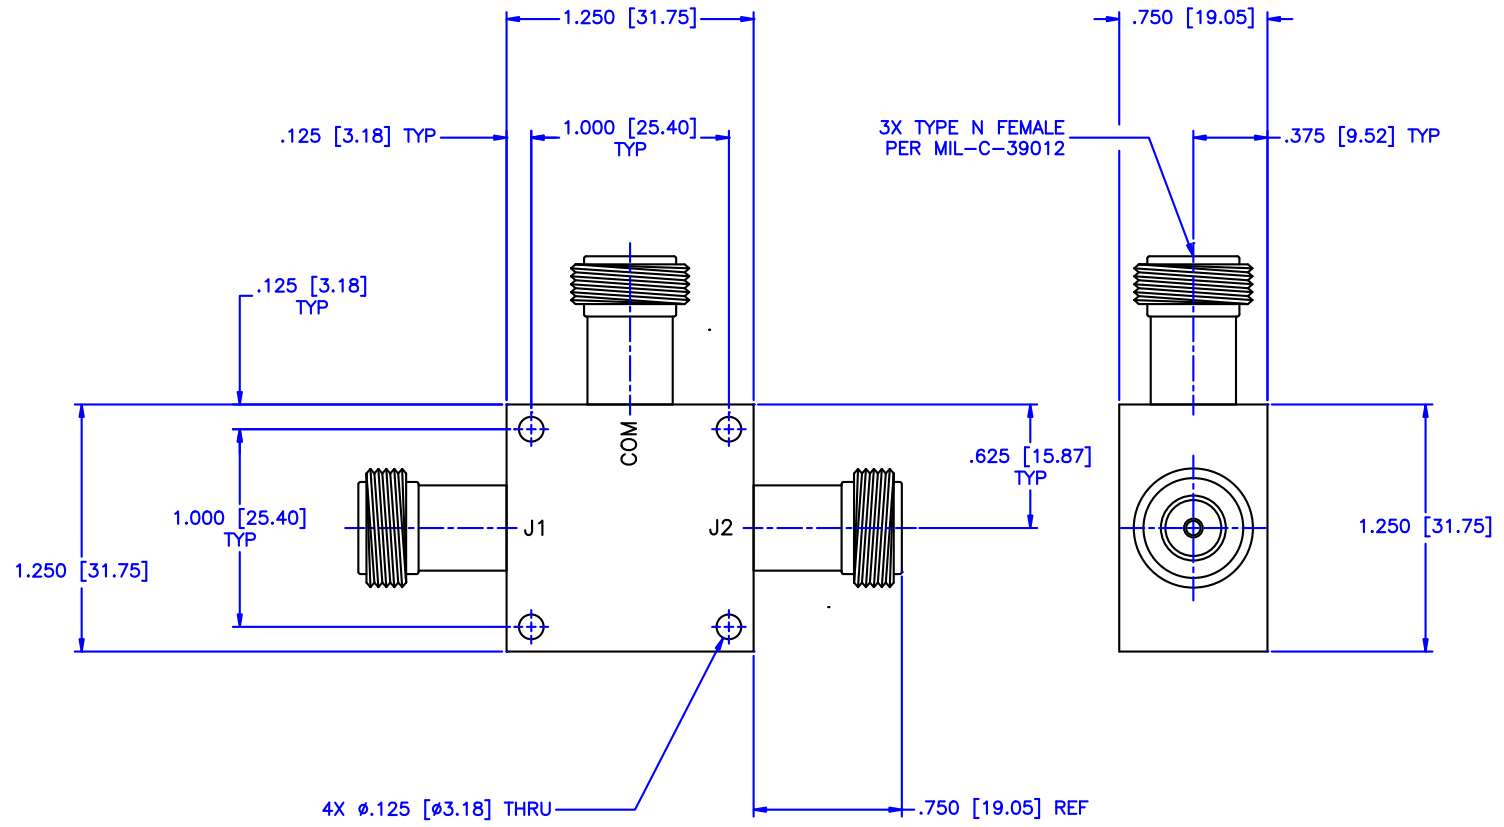

SPECIFICATIONS

- Frequency Range: 2 to 500 MHz
- Isolation: 28dB Min.
- Insertion Loss: 0.7dB Max.
- Amplitude Balance: ±2.0dB Max.
- VSWR: 1.30:1 Max.
- Phase Balance: ±2.0dB Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		2-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 10-22-1997		PART NO.:		PL2-3/NF
APPROVED: T. Nguyen		DATE: 10-22-1997		CAGE CODE:	SIZE: A	REV: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		OD2L5	DO NOT SCALE THE DRAWING	
					DWG NO. 80117	