


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

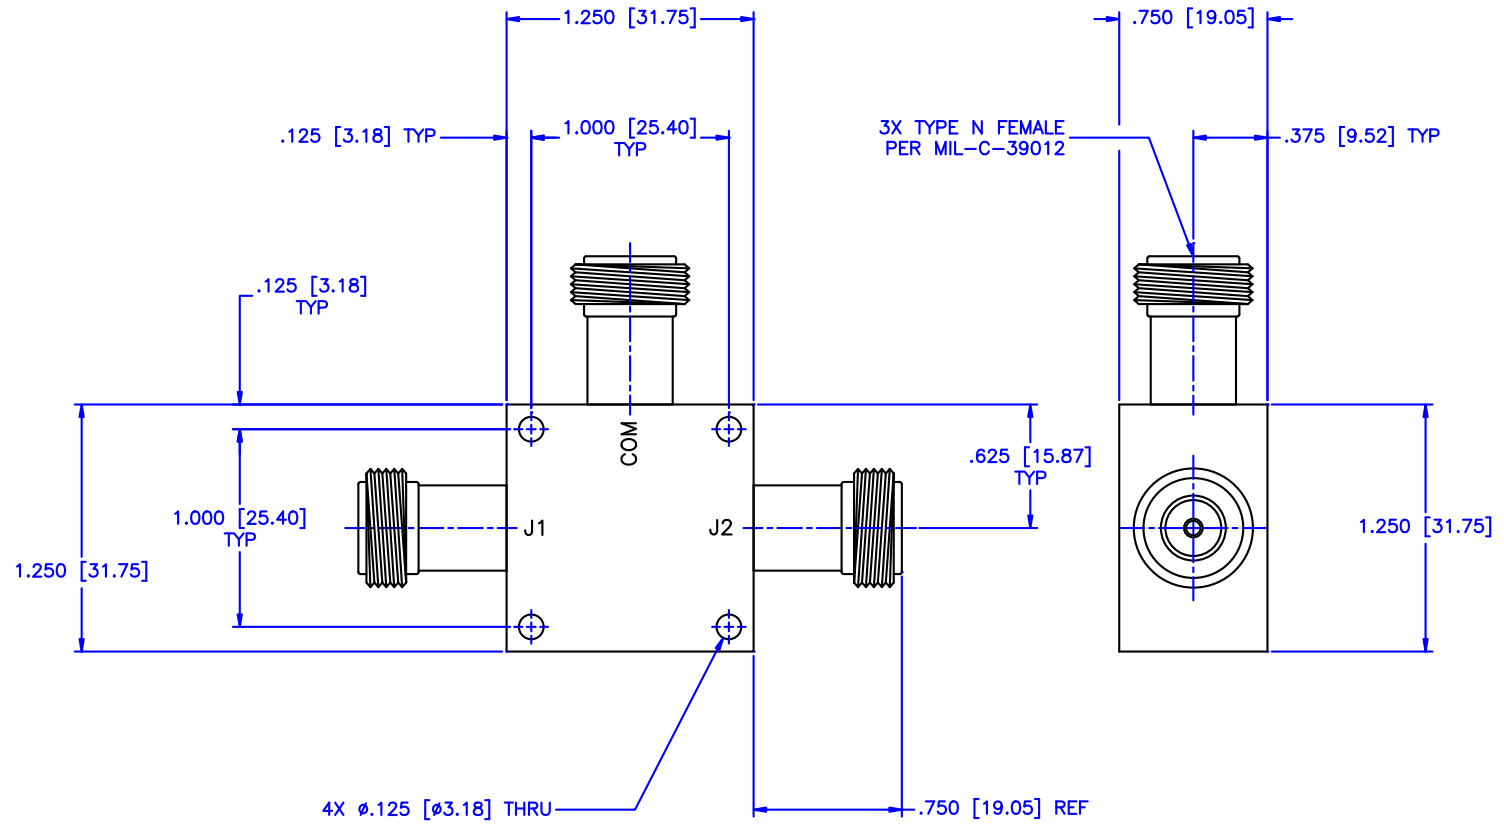

SPECIFICATIONS

- Frequency Range: 20 to 1000 MHz
- Isolation: 30dB Min.
- VSWR: 1.30:1 Max.
- Insertion Loss: 1.3dB Max.
- Amplitude Balance: ±0.40 dB Max.
- Phase Balance: ±5° Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL2-6/NF		
DATE: 10-22-1997	DATE: 10-22-1997	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen		DWG NO. 80120		
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		