


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

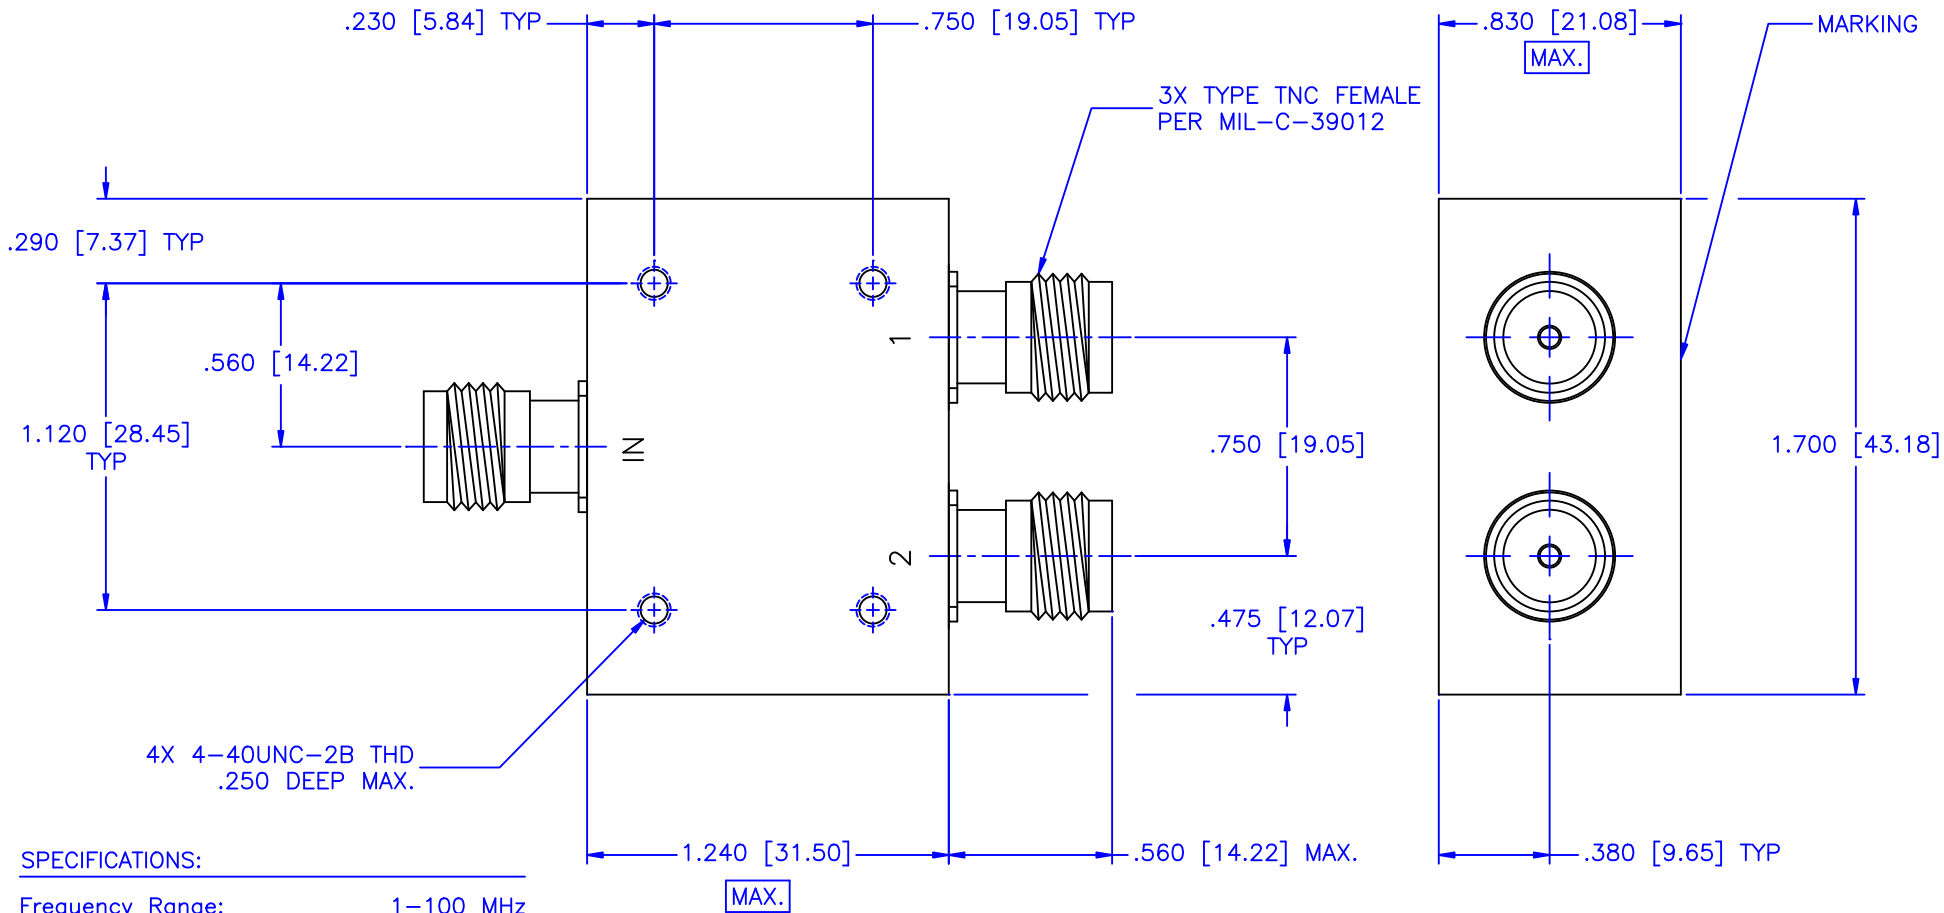

SPECIFICATIONS:

Frequency Range:	1-100 MHz
Isolation Minimum:	30dB
VSWR Maximum:	1.30:1
Insertion Loss Maximum:	0.5dB
Amplitude Balance Maximum:	±0.2dB
Average Coupling:	3dB +.2/-0
Power Level Peak:	5 Watts
Operating Temperature:	0°C to +40°C
Storage Temperature:	-40°C to +100°C
Impedance:	50 Ohms
Weight:	0.198 Lbs [90 Grams]

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWN:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.025 ±.015 ANGLE: ±1/2°	DRAWING TITLE:	
DATE:			2-WAY POWER DIVIDER	
APPROVED:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.:	
DATE:			PL2-M2/TNC	
THIRD ANGLE PROJECTION		CAGE CODE:	SIZE:	REV:
		OD2L5	A	N/A
		DO NOT SCALE THE DRAWING		DWG NO.:
				83837