


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

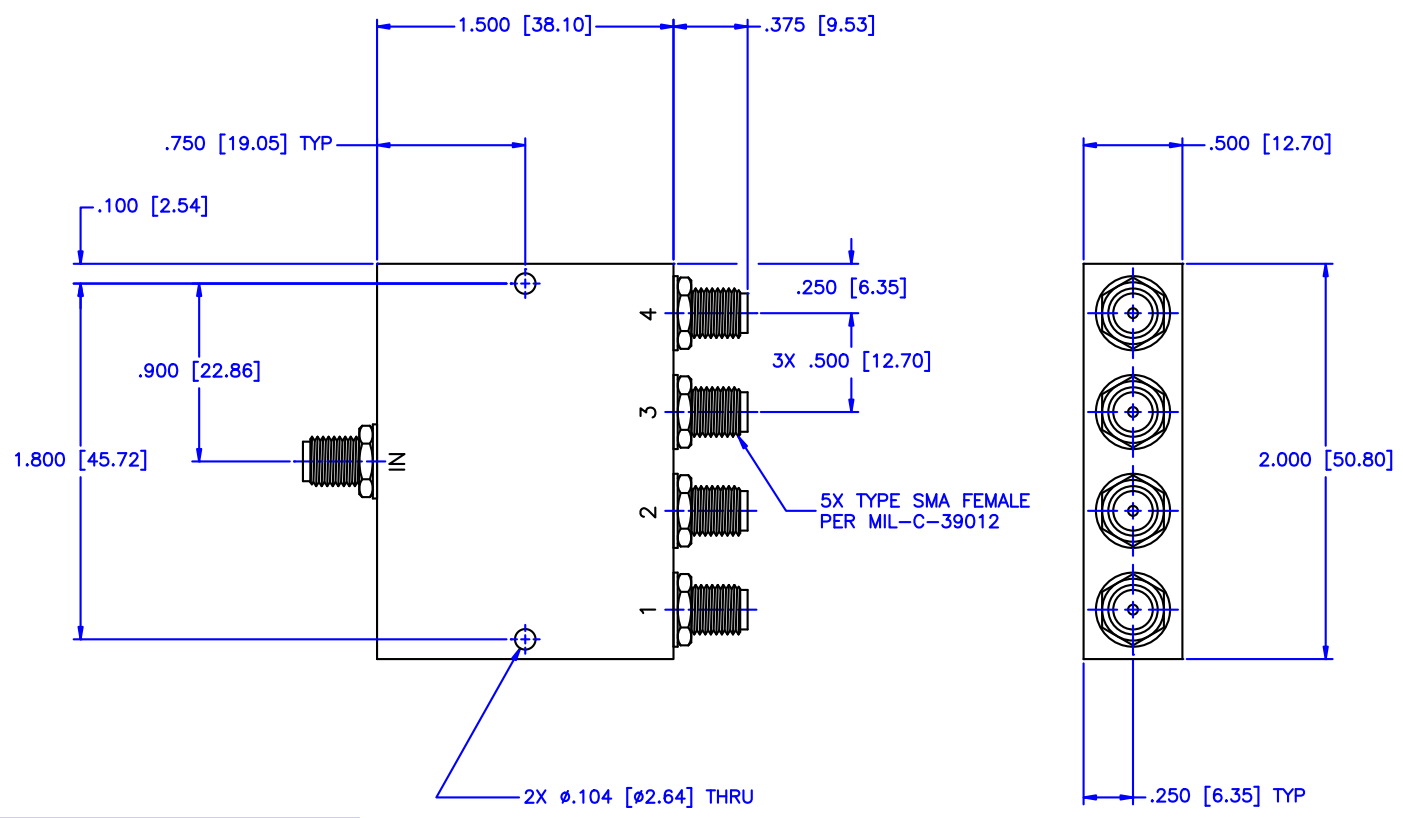

**SPECIFICATIONS:**

- Frequency Range: 20 to 400 MHz
- Isolation Minimum: 17dB
- VSWR Maximum: 1.30:1
- Insertion Loss Maximum: 1.8dB
- Amplitude Balance Maximum: ±0.5dB
- Phase Balance Maximum: ±5° Degrees

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A	
			SHEET: N/A	
		DRAWING TITLE: 4-WAY POWER DIVIDER		
		PART NO. PL4-12		
DRAWN: Paiboon Luekhamhan DATE: 05-28-2009	DATE: 05-28-2009	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		
APPROVED: T. Nguyen	DATE: 05-28-2009	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING
		THIRD ANGLE PROJECTION		DWG NO. 84551