


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

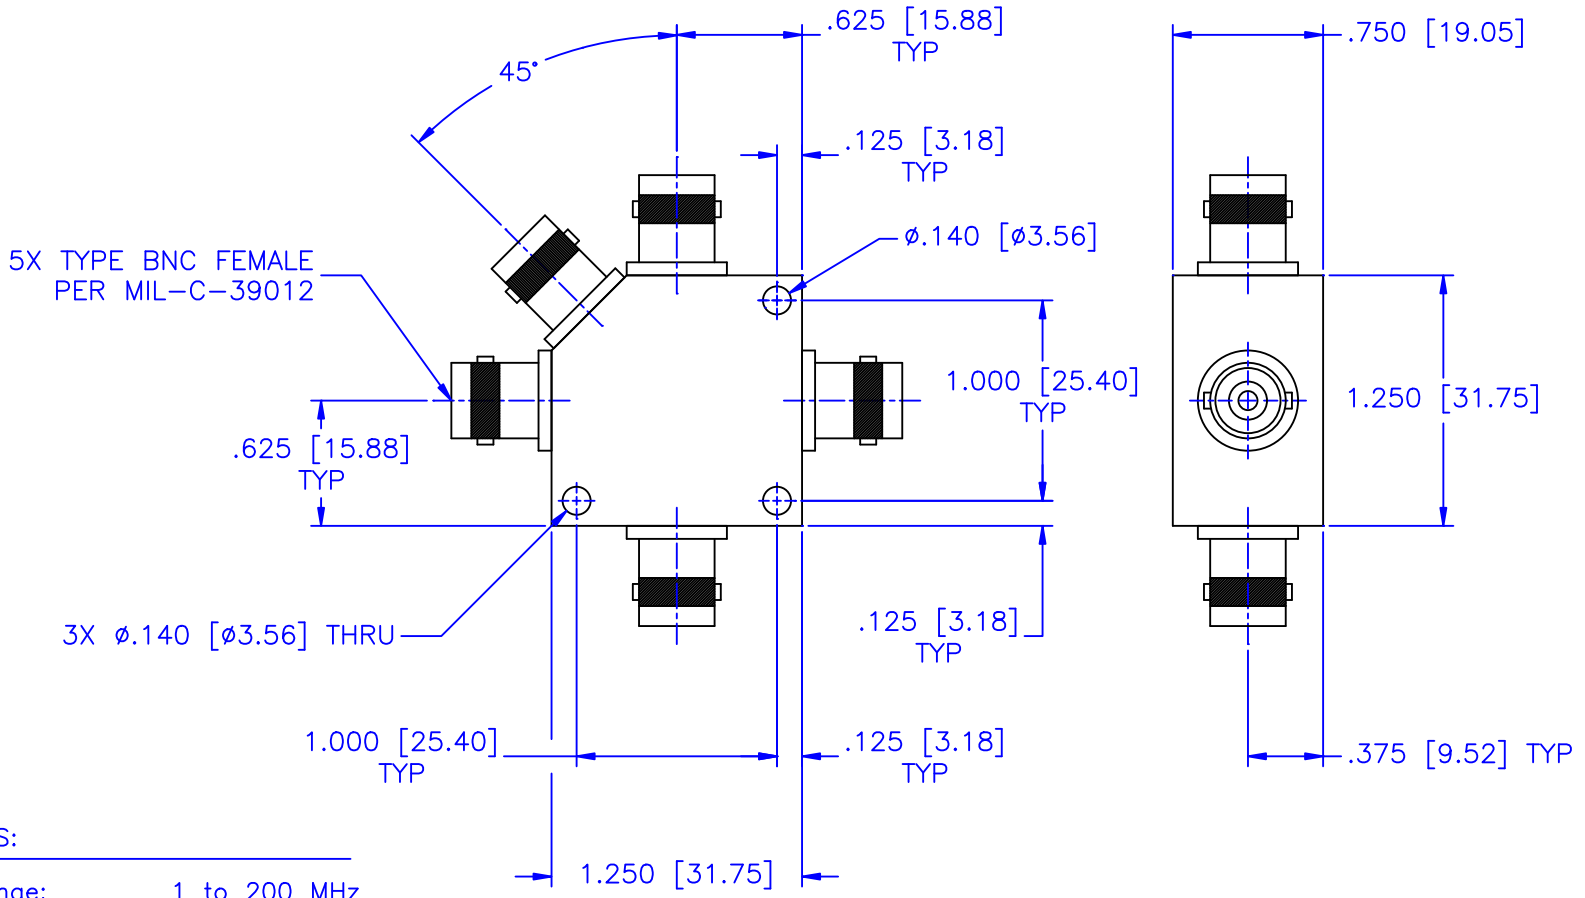

SPECIFICATIONS:

- Frequency Range: 1 to 200 MHz
- Isolation: 20dB Min.
- VSWR: 1.50:1 Max.
- Insertion Loss: 0.7dB Typ.
- Amplitude Unbalance: ±0.30dB Max.
- Phase Unbalance: ±10° Max.
- Impedance: 50 ohms

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 4-WAY POWER DIVIDER
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: PL4-17/BF
DRAWN: Paiboon Luekhamhan	DATE: 08-02-1998	THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5
APPROVED: T. Nguyen	DATE: 08-02-1998	SIZE: A	REV: n/a
		DO NOT SCALE THE DRAWING	
		DWG NO.: 81133	