


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

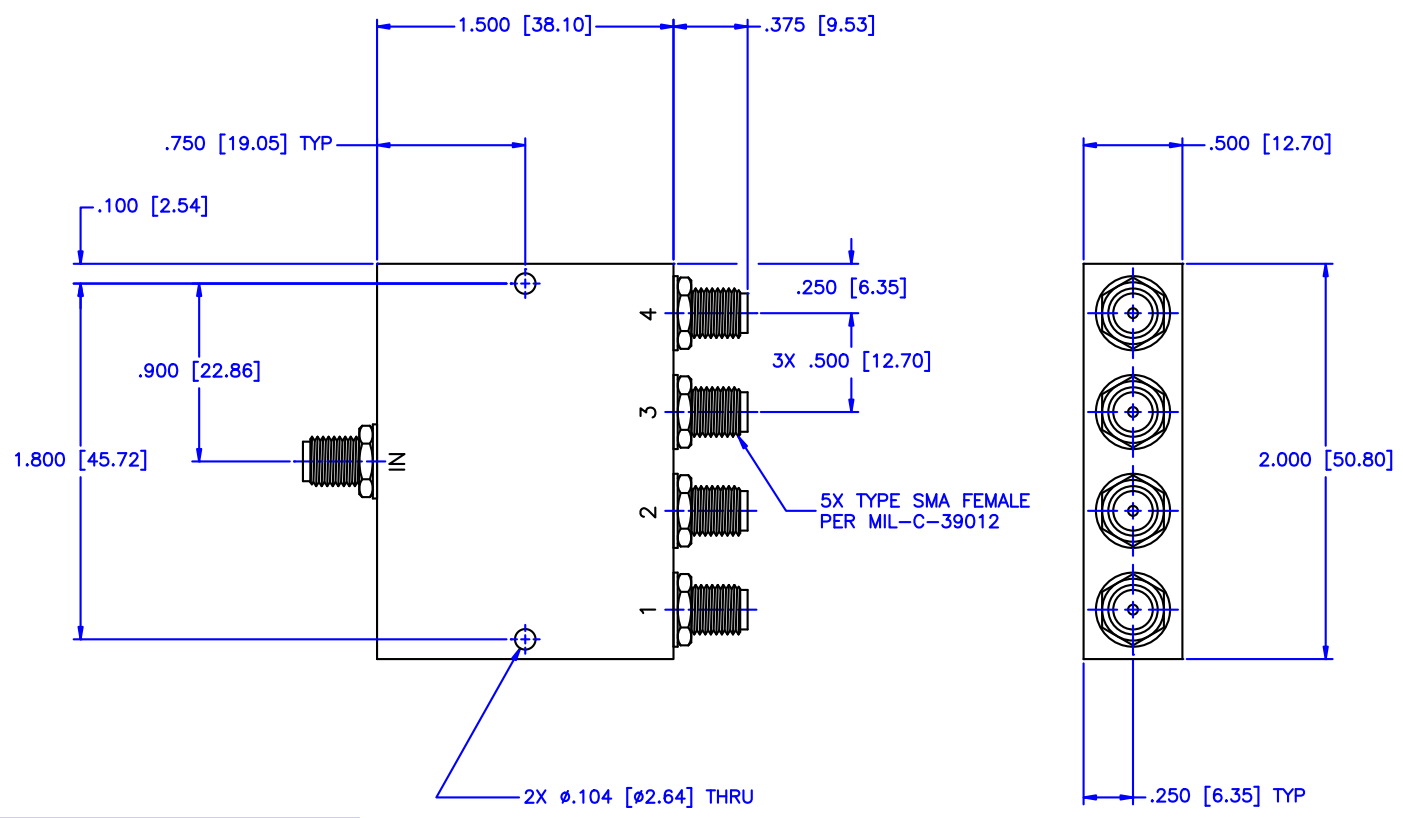

SPECIFICATIONS:

- Frequency Range: 0.5 to 100 MHz
- Isolation Minimum: 25dB
- VSWR Maximum: 1.30:1
- Insertion Loss Maximum: 0.8dB
- Amplitude Balance Maximum: ±0.1dB
- Phase Balance Maximum: ±1° Degrees

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A		
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		4-WAY POWER DIVIDER			
DRAWN:		DATE:		PART NO.		PL4-1		
Paiboon Luekhamhan 05-28-2009		T. Nguyen 05-28-2009		CAGE CODE:		SIZE:	REV:	DWG NO.
APPROVED:		DATE:		OD2L5		A	B	84518
THIRD ANGLE PROJECTION				DO NOT SCALE THE DRAWING				