


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

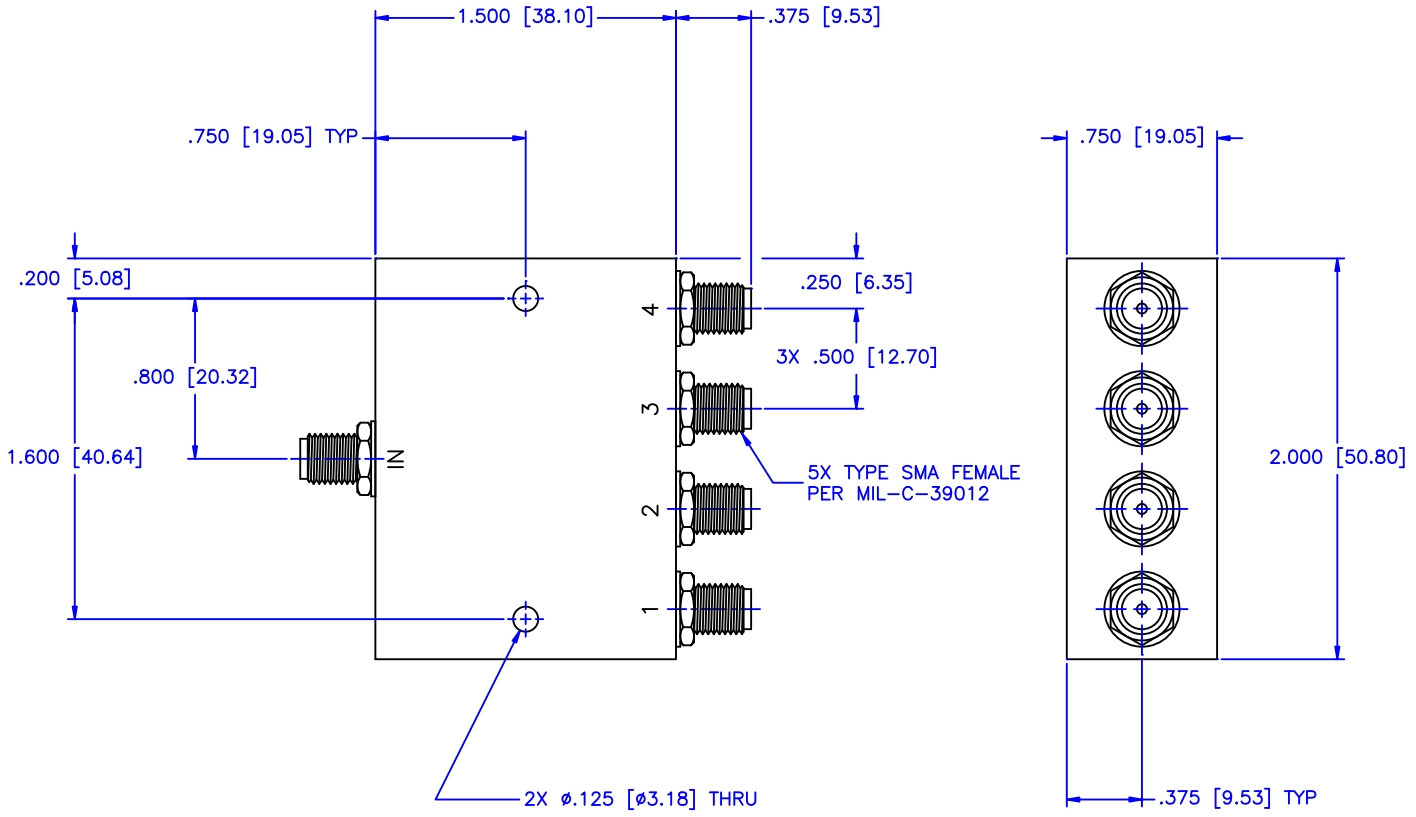

SPECIFICATIONS:

- Frequency Range: 3 to 500 MHz
- Isolation Minimum: 25dB
- VSWR Maximum: 1.30:1
- Insertion Loss Maximum: 1.0dB
- Amplitude Balance Maximum: ±0.2dB
- Phase Balance Maximum: ±2° Degrees

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	4-WAY POWER DIVIDER
DRAWN: Paiboon Luekhamhan	DATE: 07-31-2001	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:	PL4-2
APPROVED: T. Nguyen	DATE: 07-31-2001	THIRD ANGLE PROJECTION 	CAGE CODE:	SIZE:	A N/A DO NOT SCALE THE DRAWING
			OD2L5	DWG NO.:	80165