


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

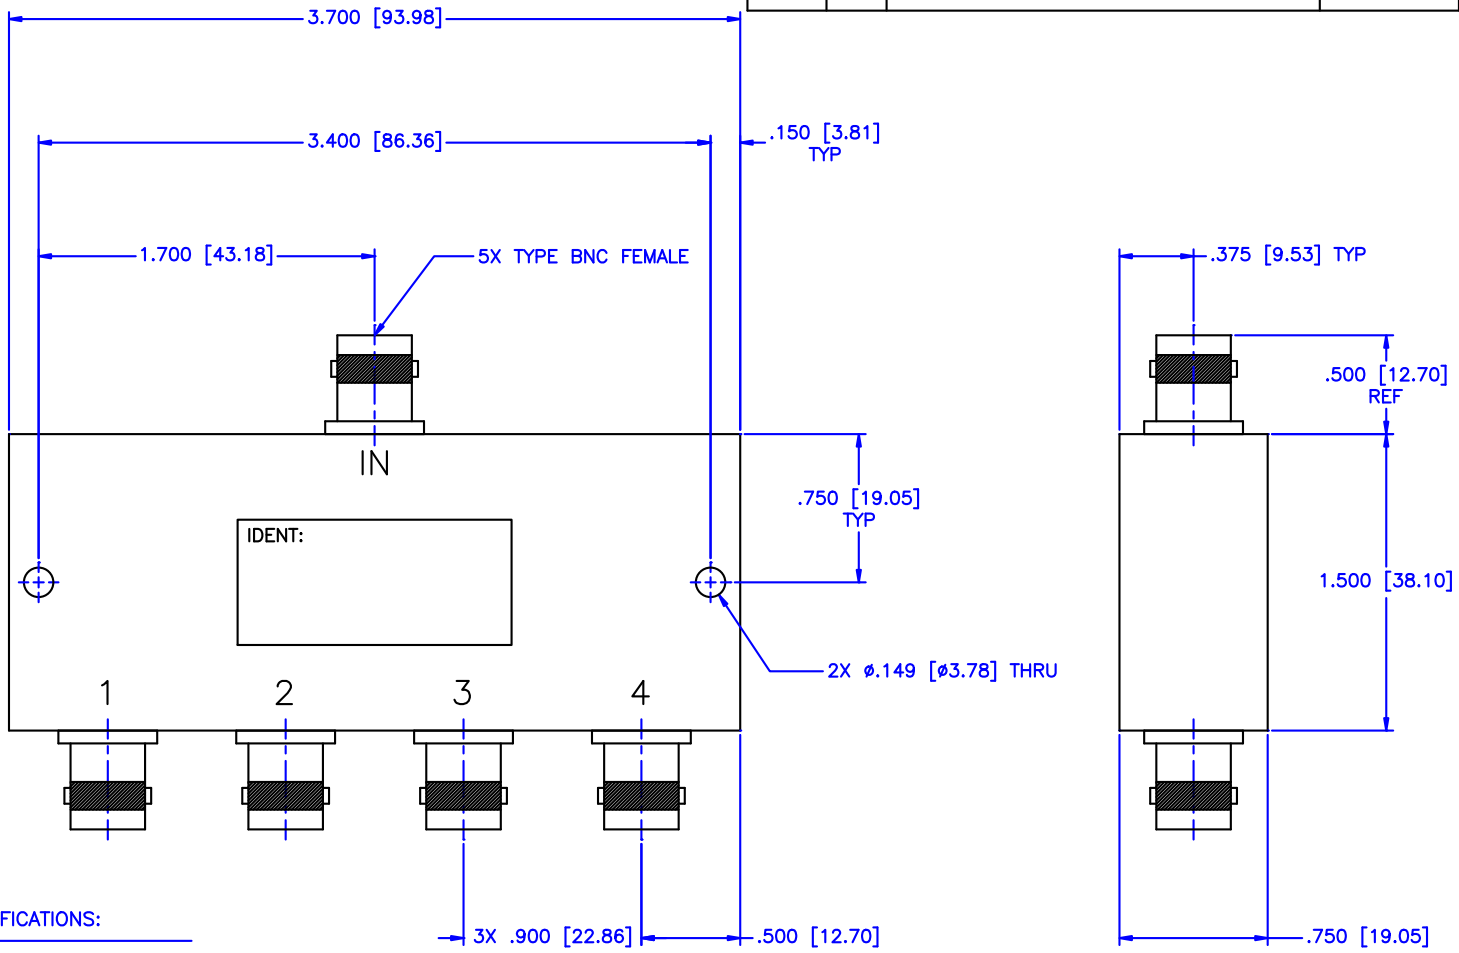

SPECIFICATIONS:

- Frequency Range: 70–140 MHz
- Isolation: 20dB Min.
- Insertion Loss: 1.0dB Max.
- Amplitude Balance: 0.2dB Max.
- Phase Balance: 1.5° Max.
- VSWR: 1.20:1 Max.
- Impedance: 75 Ohms
- Power Input: 0.5 Watt Max.

MATERIAL: _____		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL4-21-S-75/BF		
DATE: 09-04-2001		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 09-04-2001		SIZE: A REV: N/A DWG NO.: 84747
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		