


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

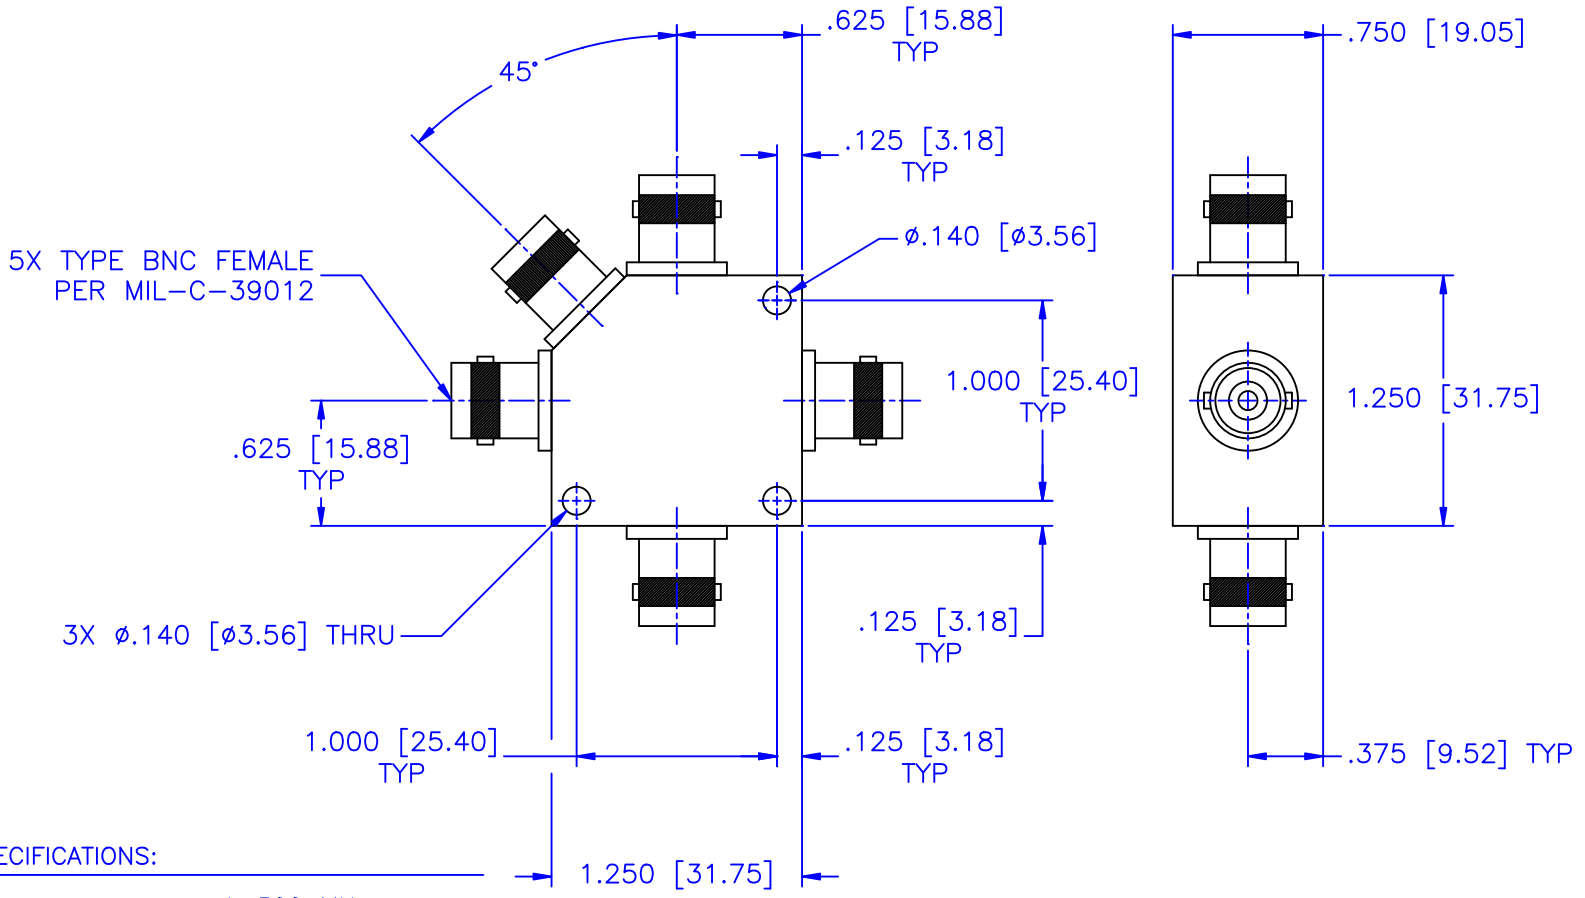

**ELECTRICAL SPECIFICATIONS:**

Frequency Range:	1-500 MHz
Isolation Minimum:	25dB
Insertion Loss Maximum:	1.0dB
Amplitude Balance Maximum:	$\pm$ 0.2dB
Phase Balance Maximum:	$\pm$ 2.0° Degrees
VSWR Maximum:	1.30:1

MATERIAL:	<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
		SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm$ 1/64 DECIMALS: $\pm$ .01 $\pm$ .005 ANGLE: $\pm$ 1/2°		DRAWING TITLE: <b>4-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan DATE: 02-20-2007		PART NO.: <b>PL4-23/BF</b>	
APPROVED: T. Nguyen DATE: 02-20-2007		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 82784
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES, INC. (MCLI)		DO NOT SCALE THE DRAWING	
THIRD ANGLE PROJECTION			