


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

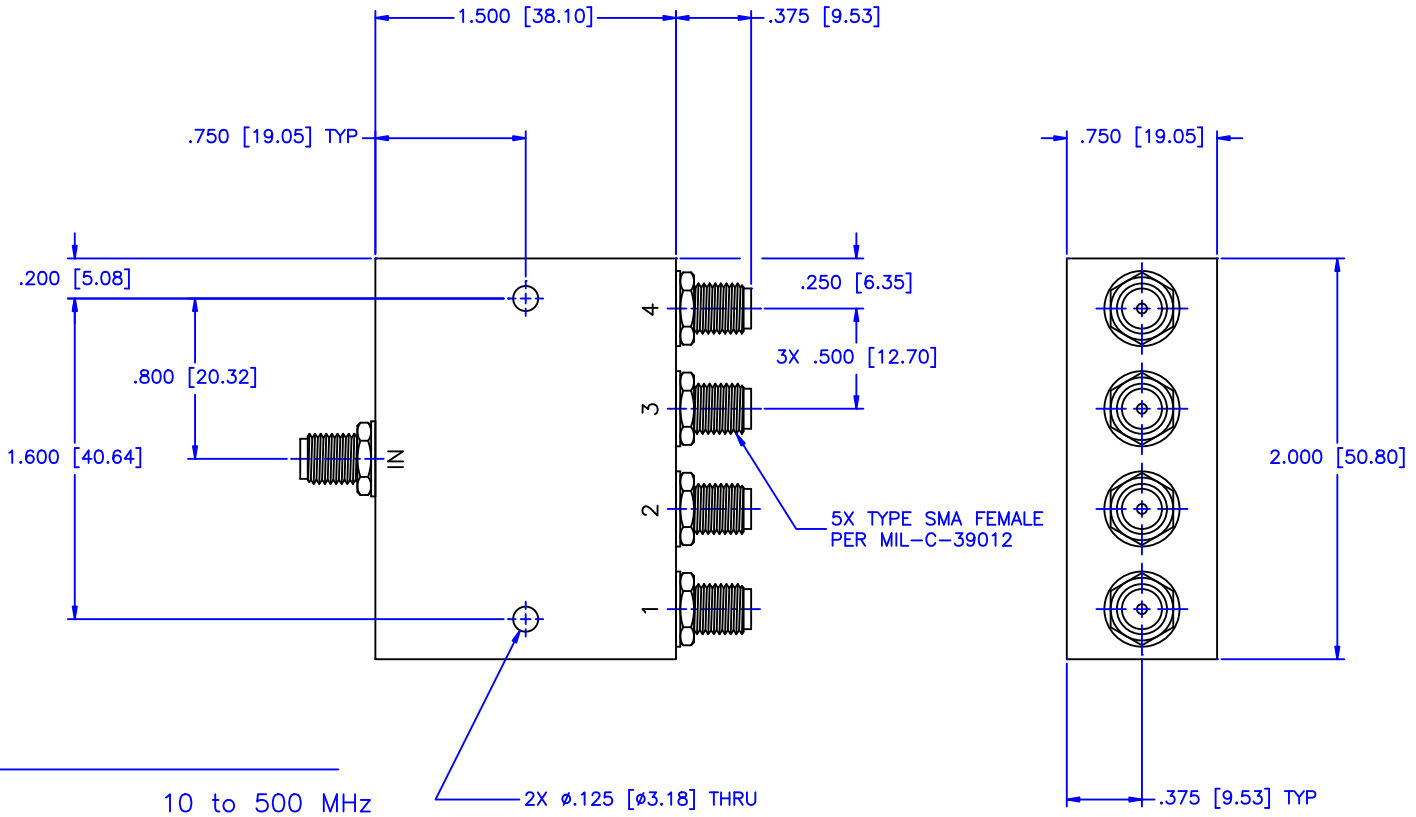

SPECIFICATIONS:

Frequency Range:	10 to 500 MHz
Isolation Minimum:	25dB
VSWR Maximum:	1.30:1
Insertion Loss Maximum:	1.0dB
Amplitude Balance Maximum:	±0.2dB
Phase Balance Maximum:	±2° Degrees
Power Maximum:	1 Watt

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:		N/A
DRAWN:		DATE:		DRAWING TITLE:			4-WAY POWER DIVIDER
Paiboon Luekhamhan		07-31-2001		PART NO.			
APPROVED:		DATE:		DRAWING TITLE:			PL4-24
T. Nguyen		07-31-2001		PART NO.			
THIRD ANGLE PROJECTION		CAGE CODE:		SIZE:	REV:	DWG NO.	
		OD2L5		A	N/A	83056	
DO NOT SCALE THE DRAWING							