


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

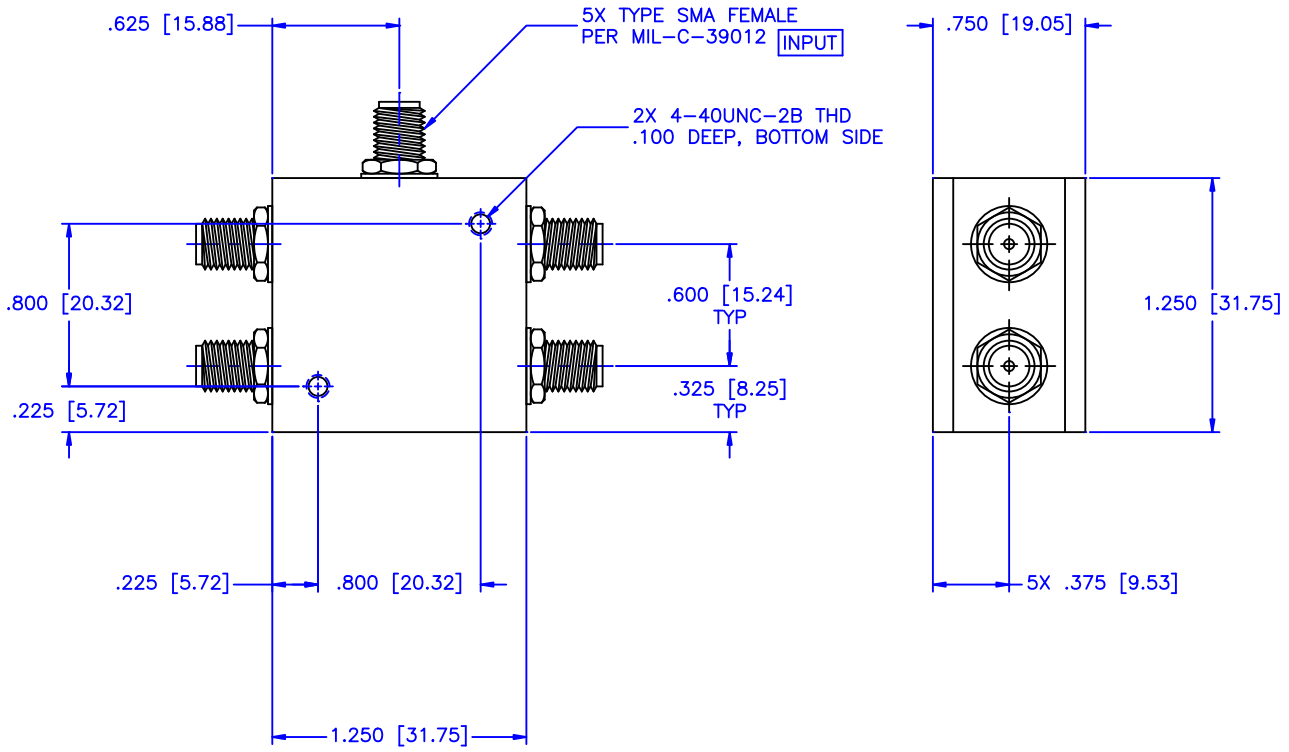

SPECIFICATIONS:

- Frequency Range: 200 to 1000 MHz
- Insertion Loss Maximum: 3.0 dB
- Input Power: 1 Watt
- Impedance: 50 Ohms
- Isolation Minimum: 15 dB
- Phase Unbalance Maximum: 7.0° Degrees
- Amplitude Unbalance Maximum: 0.7 dB
- Operating Temperature: -20°C to +70°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan DATE: 03-20-2008		PART NO.: PL4-3	
APPROVED: T. Nguyen DATE: 03-20-2008		CAGE CODE: OD2L5	SIZE: A REV: A DWG NO.: 82810
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	