


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

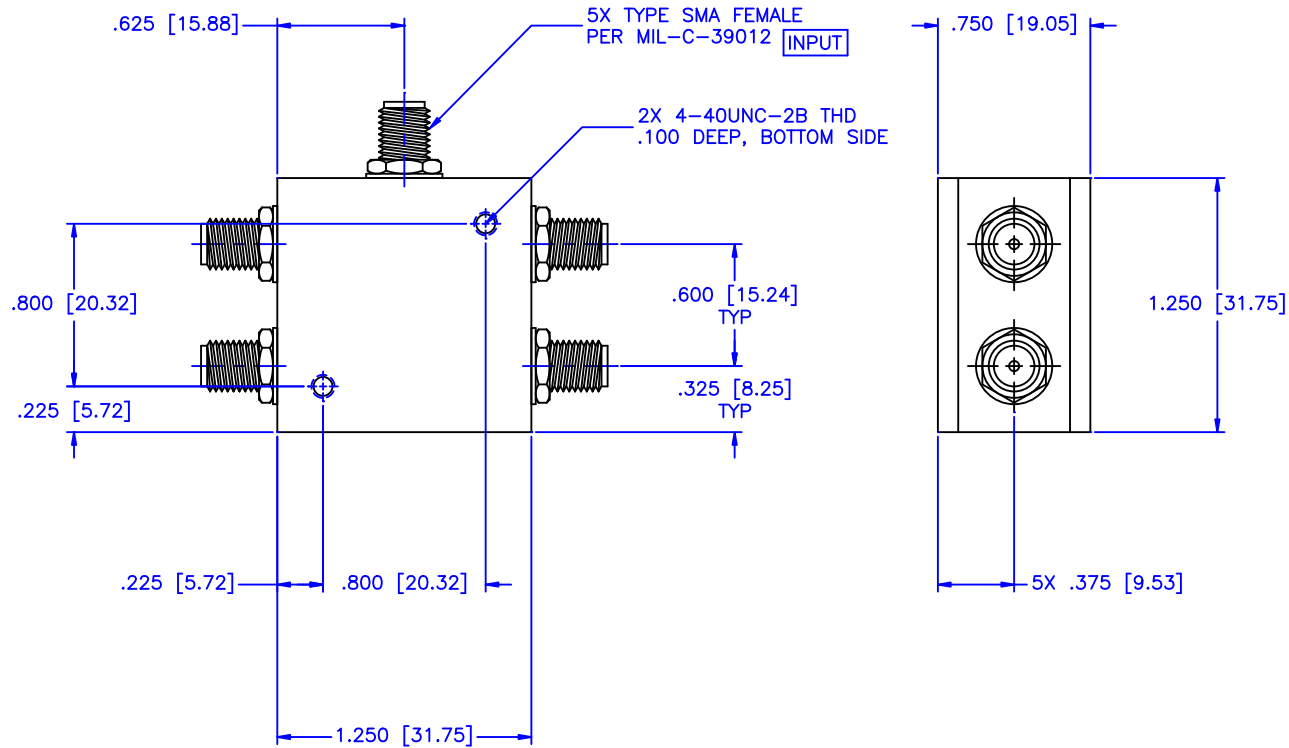

SPECIFICATIONS:

Frequency Range:	5 to 2000 MHz
Insertion Loss Maximum:	2.8 dB
Input Power:	1 Watt
Impedance:	50 Ohms
Isolation Minimum:	16 dB
Phase Unbalance Maximum:	6.0° Degrees
Amplitude Unbalance Maximum:	0.6 dB
Operating Temperature:	-20°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PL4-4		
DATE: 03-20-2008		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 03-20-2008		DWG NO. 82799
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: A REV: A DO NOT SCALE THE DRAWING		