


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

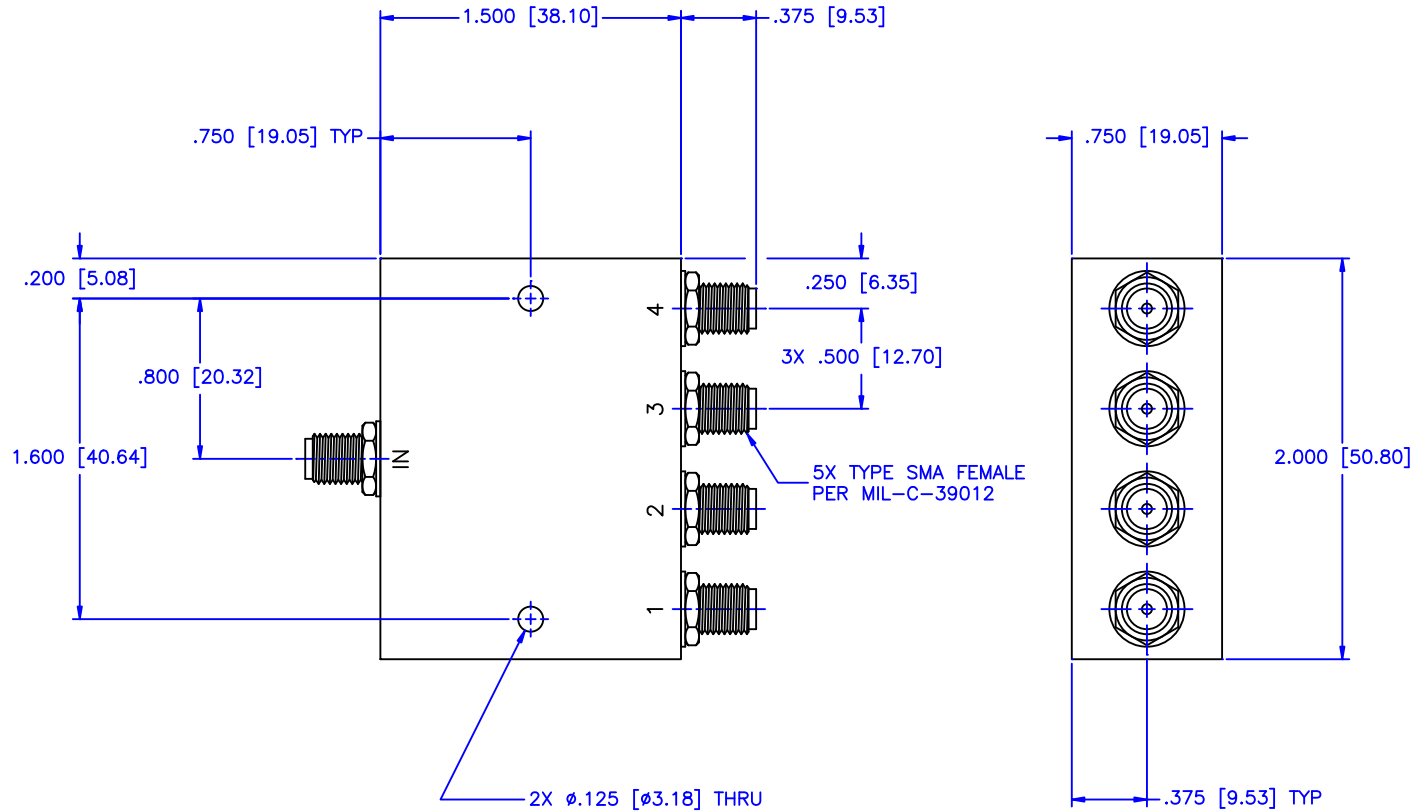

SPECIFICATIONS:

- Frequency Range: 10 to 1000 MHz
- Isolation Minimum: 20dB
- VSWR Maximum: 1.70:1
- Insertion Loss Maximum: 1.8dB
- Amplitude Balance Maximum: ± 0.5 dB
- Phase Balance Maximum: $\pm 6^\circ$ Degrees

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE: 4-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 07-31-2001		PART NO. PL4-7	
APPROVED: T. Nguyen		DATE: 07-31-2001		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO. 80169 DO NOT SCALE THE DRAWING
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 	