




SPECIFICATIONS:

FREQUENCY RANGE (MHz)	ISOLATION (dB) Min	INSERTION LOSS (dB) Max	PHASE UNBALANCE (Degrees) Max	AMPLITUDE UNBALANCE (dB) Max	VSWR Max
10-1000	23	1.6	5.0	0.40	1.40:1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

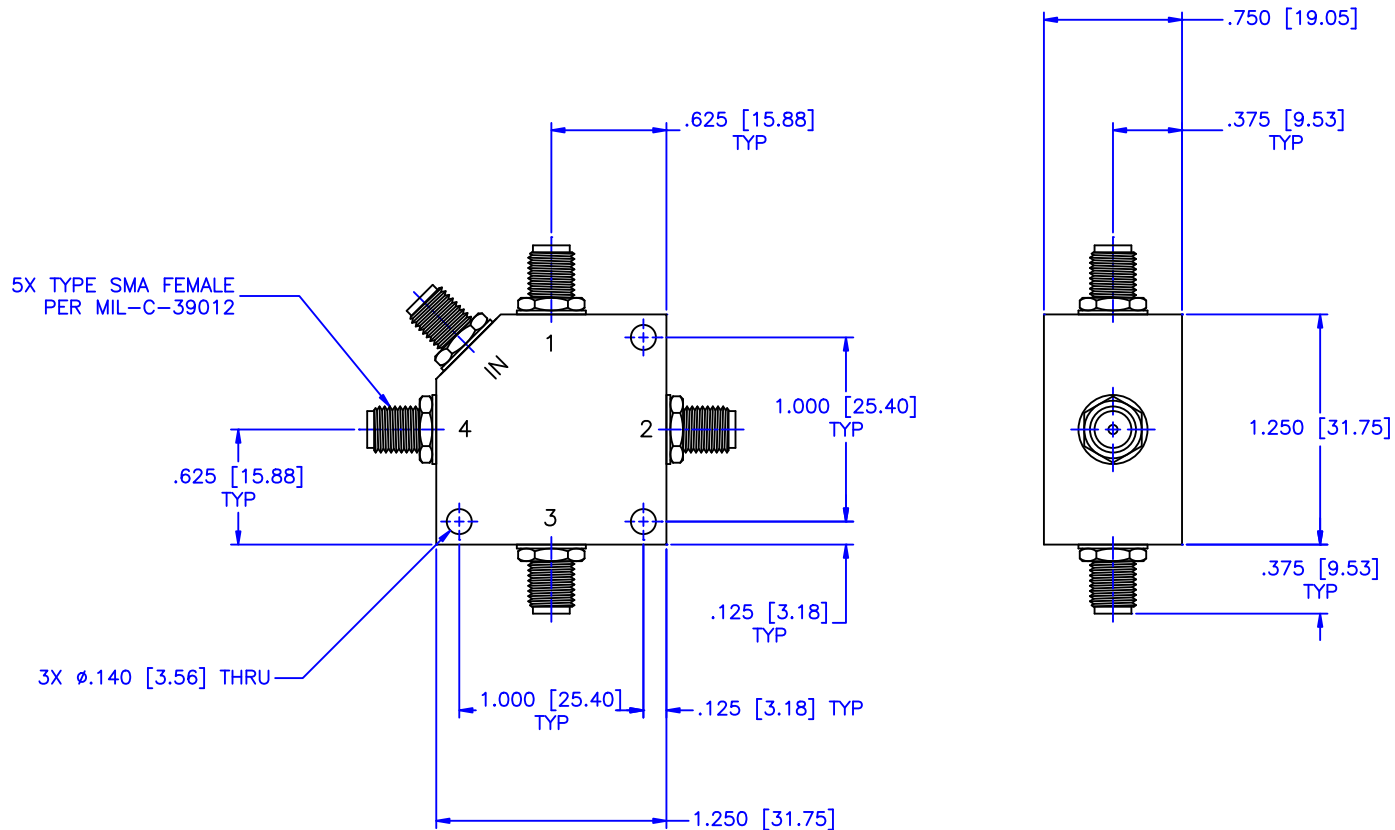

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 08-21-2008
APPROVED: T. Nguyen	DATE: 08-21-2008



MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE:
4-WAY POWER DIVIDER

PART NO.:
PL4-8

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

CAGE CODE: OD2L5	SIZE: N/A	REV: A	DWG NO. 82916
DO NOT SCALE THE DRAWING			

